ILS or LOC RWY 32

SMYRNA (MQY)

LOC I-MQY	APP CRS	Rwy Ldg	8038
111.1	321°	TDZE	518
		Apt Elev	543

DME required.

T A NA — Circling Rwy 14 NA at night. DME from BNA VORTAC, simultaneous reception of I-MQY and BNA DME required. For Inop ALS, increase S-LOC 32 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 060° and on BNA VORTAC R-104 to WORDU/ BNA 18.6 DME and hold.

AWOS-3PT	NASHVILLE APP CON	SMYRNA TOWER ★	GND CON	UNICOM
119.125	118.4 360.7	118.5 (CTAF) L 233.1	121.4	122.95

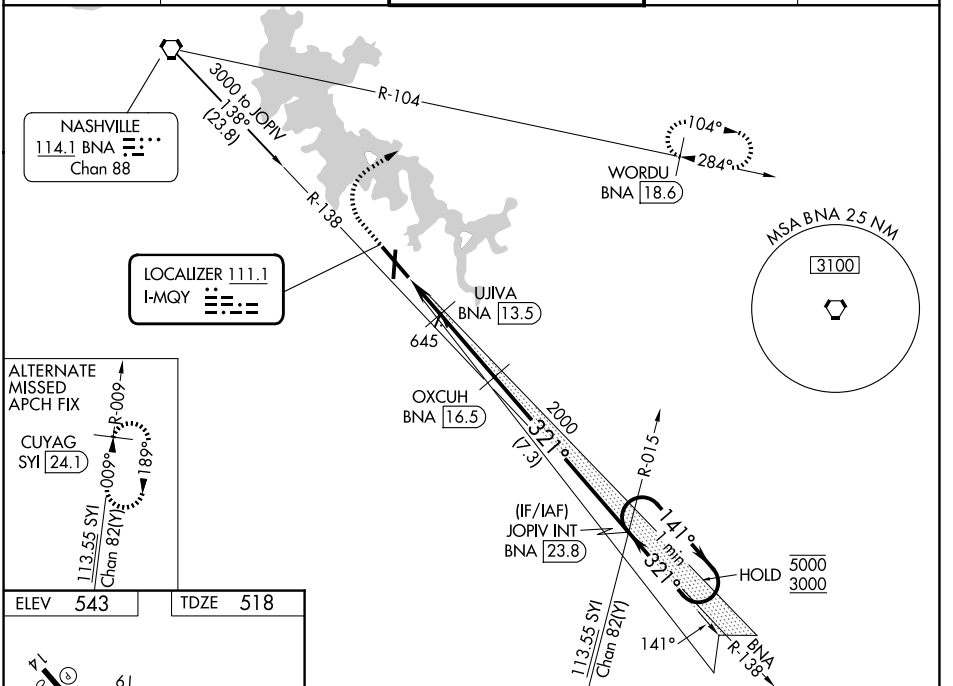

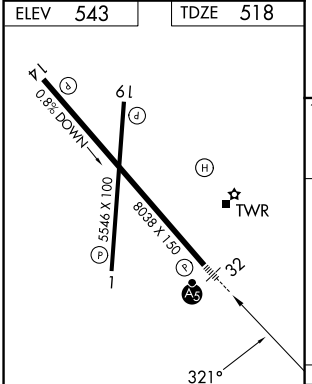

REIL Rwy 14 L
HIRL Rwy 14-32 L
MIRL Rwy 1-19 L
REIL Rwys 1, 19, and 32

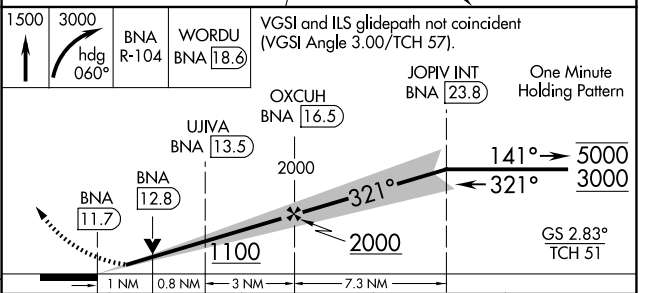

CATEGORY	A	B	C	D
S-ILS 32	718-½ 200 (200-½)			
S-LOC 32	900-½ 382 (400-½)		900-⅝ 382 (400-⅝)	
CIRCLING	1100-1 557 (600-1)	1180-1 637 (700-1)	1260-2 717 (800-2)	1480-3 937 (1000-3)

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026