WAAS CH 82416 W05A	APP CRS 046°	Rwy Ldg 5320 TDZE 16 Apt Elev 17

RNAV (GPS) Y RWY 5

SOUTHWEST OREGON RGNL (OTH)

RNP APCH.

Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 6000 direct RUNUE and on track 015° to RARES and hold, continue climb-in-hold to 6000.

AWOS-3PT	SEATTLE CENTER	NORTH BEND TOWER★	GND CON
135.075	127.55 254.35	118.45 (CTAF) L	127.1

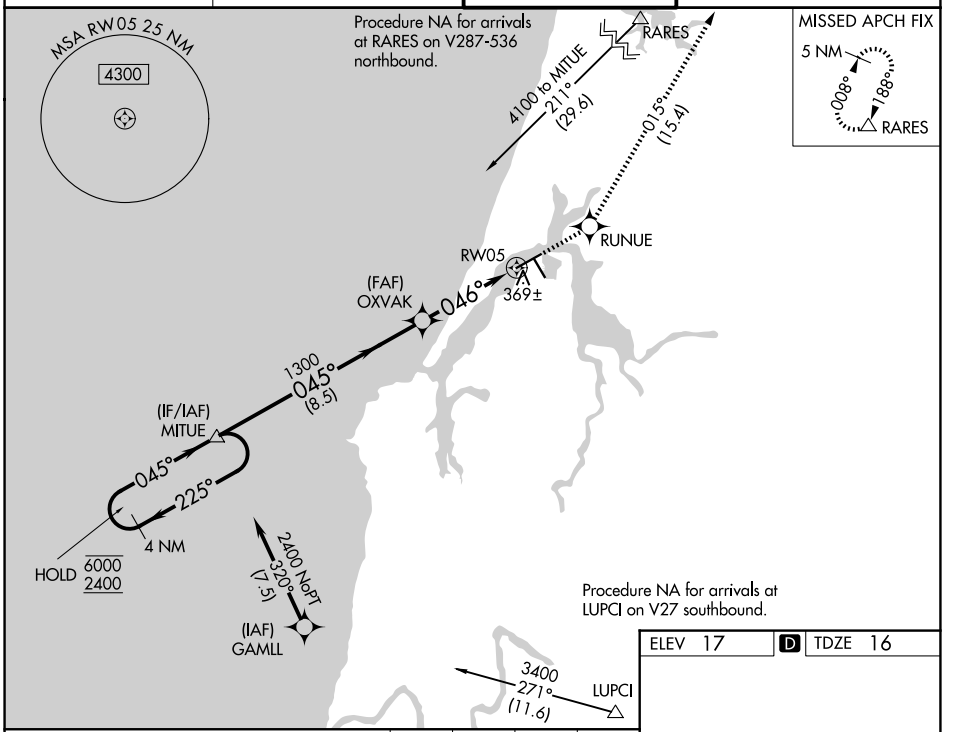

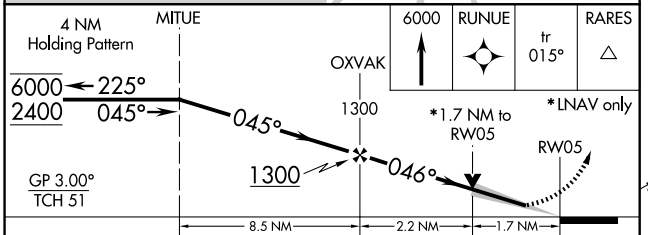

ELEV 17 D TDZE 16



CATEGORY	A	B	C	D
LPV DA	319-½ 303 (400-½)			
LNAV/VNAV DA	550-1⅜ 534 (600-1⅜)			
LNAV MDA	620-½ 604 (700-½)		620-1⅜ 604 (700-1⅜)	
CIRCLING	680-1 663 (700-1)	820-1 803 (900-1)	1100-3 1083 (1100-3)	1160-3 1143 (1200-3)

HIRL Rwy 5-23 L
MIRL Rwy 13-31 L
REIL Rwys 13, 23 and 31 L

NW-1, 03 SEP 2026 to 01 OCT 2026
NW-1, 03 SEP 2026 to 01 OCT 2026