RNAV (GPS) RWY 24

SPRINGFIELD/BECKLEY MUNI (SGH)

WAAS CH 97615 W24A	APP CRS 238°	Rwy Ldg 9009 / TDZE 1048 / Apt Elev 1051

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM.

SSALR

MISSED APPROACH: Climb to 3000 direct KAPTE and left turn on track 127° to ANDII and hold.

AWOS-3PT	COLUMBUS APP CON	UNICOM
134.975	118.85 269.275	122.95 (CTAF) L

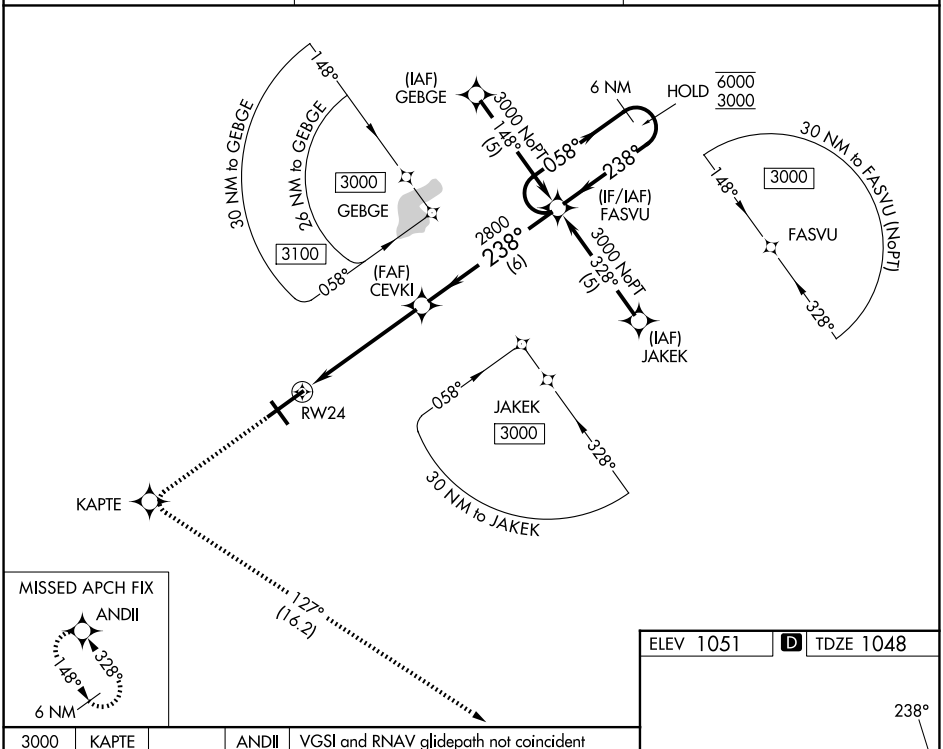

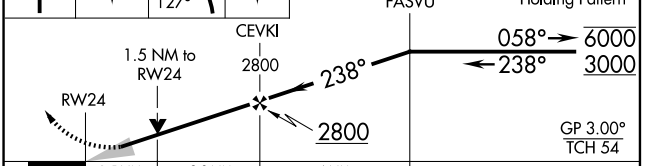

CATEGORY	A	B	C	D
LPV DA	1248-½ 200 (200-½)			
LNAV/VNAV DA	1398-⅝ 350 (400-⅝)			
LNAV MDA	1580-½ 532 (600-½)		1580-1 532 (600-1)	
CIRCLING	1580-1 529 (600-1)		1580-1½ 529 (600-1½)	1620-2 569 (600-2)

ELEV 1051 D TDZE 1048



HIRL Rwy 6-24 L
MIRL Rwy 15-33 L
REIL Rwys 6, 15 and 33 L

EC-2, 03 SEP 2026 to 01 OCT 2026
EC-2, 03 SEP 2026 to 01 OCT 2026