ILS or LOC RWY 6
TRENTON MERCER (TTN)

LOC I-TTN	APP CRS	Rwy Idg	6006
111.3	058°	TDZE	186
		Apt Elev	213

When Circling to Rwy 34 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.
For inop ALS, increase S-LOC 6 Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2700 direct ARD VOR/DME and hold, continue climb-in-hold to 2700.

ATIS	PHILADELPHIA APP CON	TRENTON TOWER ★	GND CON	UNICOM
126.775	123.8 291.7	120.7 (CTAF) L 257.8	121.9 257.8	122.95

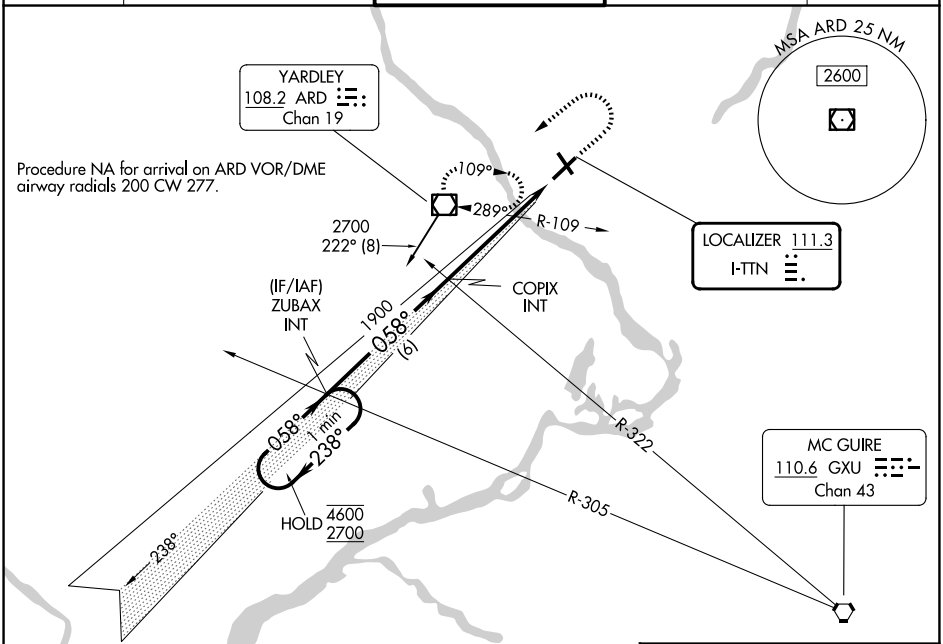

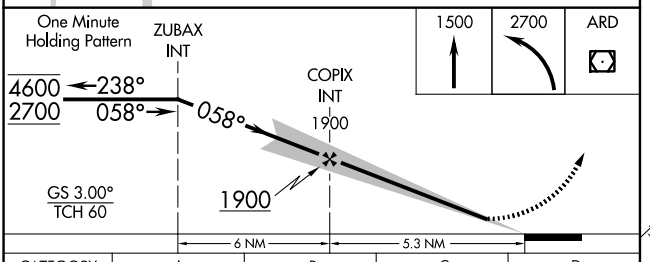

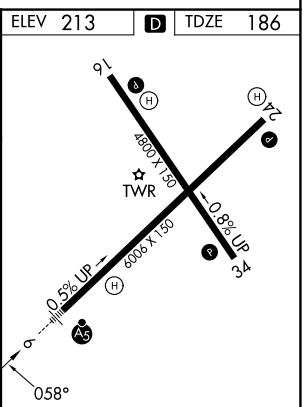

CATEGORY	A	B	C	D
S-ILS 6	390-½ 204 (200-½)			
S-LOC 6	660-½ 474 (500-½)		660- 1 474 (500-1)	
CIRCLING	680-1 467 (500-1)		760-1½ 547 (600-1½)	980-2½ 767 (800-2½)

HIRL Rwys 6-24 and 16-34 L
REIL Rwys 16, 24 and 34 L

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

NE-2, 03 SEP 2026 to 01 OCT 2026
NE-2, 03 SEP 2026 to 01 OCT 2026