RNAV (GPS) RWY 5

GROTON-NEW LONDON (GON)

WAAS CH 45521 W05A	APP CRS 048°	Rwy Ldg 5000 TDZE 8 Apt Elev 9

RNP APCH - GPS.

Circling Rwy 15 NA at night. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats visibility C/D to 1⅜.

MALSR

MISSED APPROACH: Climb to 2100 direct BRRET and on track 068° to BABET and hold, continue climb-in-hold to 2100.

ATIS	PROVIDENCE APP CON ★	GROTON TOWER ★	GND CON
127.0	125.75 319.2	125.6 (CTAF) L 236.775	121.65 236.775

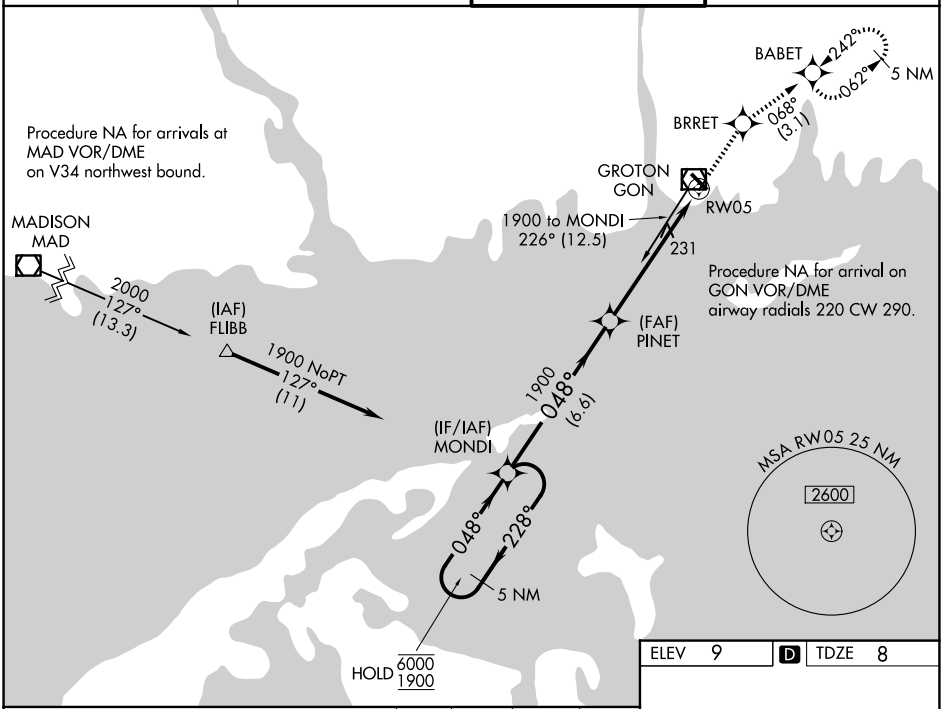

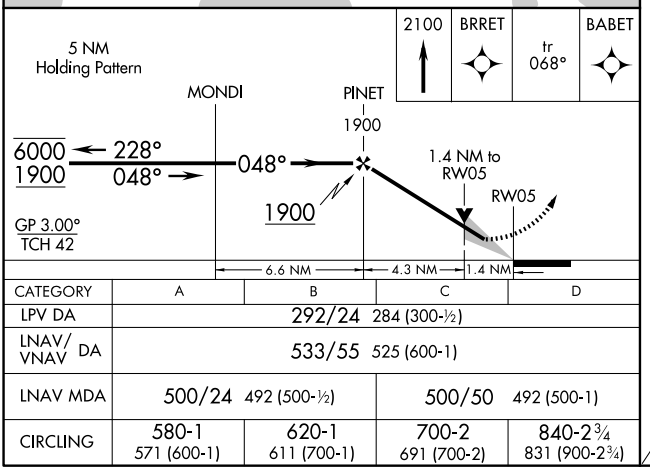

CATEGORY	A	B	C	D
LPV DA	292/24 284 (300-½)			
LNAV/VNAV DA	533/55 525 (600-1)			
LNAV MDA	500/24 492 (500-½)		500/50 492 (500-1)	
CIRCLING	580-1 571 (600-1)	620-1 611 (700-1)	700-2 691 (700-2)	840-2¾ 831 (900-2¾)

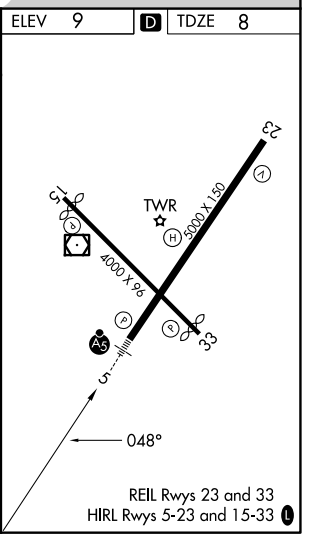

NE-1, 03 SEP 2026 to 01 OCT 2026
NE-1, 03 SEP 2026 to 01 OCT 2026