

APP CRS
104°

Rwy Ldg
6123

TDZE
27

Apt Elev
28

RNAV (GPS) RWY 12

MERCEDITA (PSE) (TJPS)

RNP APCH-GPS.


▼

NA

Obtain local altimeter setting on CTAF; when not received use Luis Munoz Marin Intl altimeter setting. Procedure NA at night. Rwy 12, 30 helicopter visibility reduction below 1 SM NA. Circling NA for Cats C and D northeast of Rwy 12-30.

MISSED APPROACH: Climbing right turn to 3000 direct SEPBO and hold.

AWOS-3PT 118.4	SAN JUAN CERAP APP CON 118.75 269.0	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

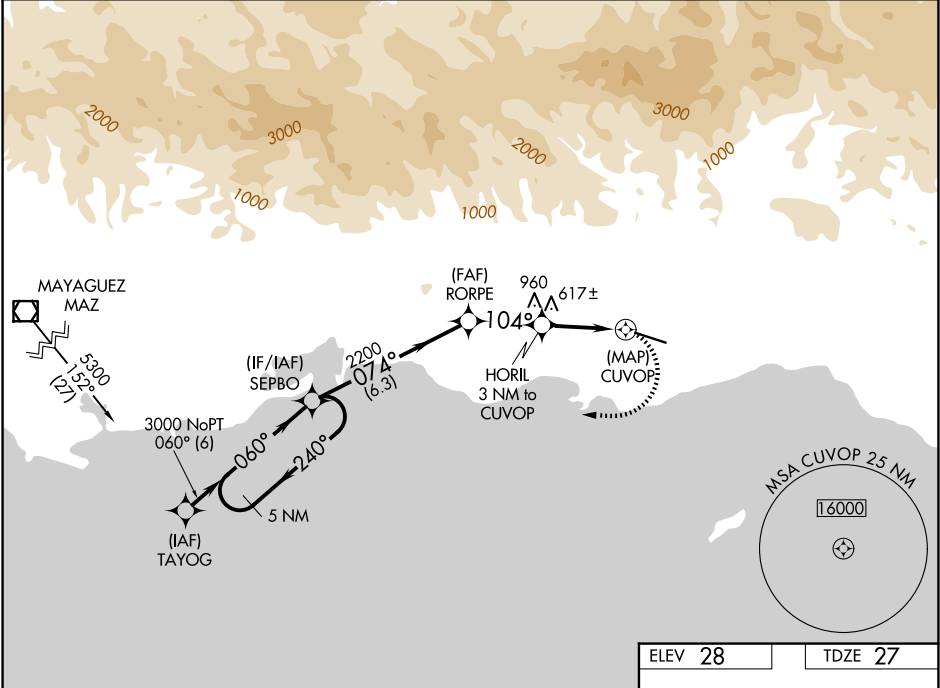

5 NM Holding Pattern SEPBO

*1880 when using Luis Munoz Marin Intl altimeter setting.

3000 SEPBO

3000

←240°

060°→

SEPBO

074°

RORPE

2200

104°

HORIL 3 NM to CUVOP

3.27°

TCH 52

*1280

CUVOP

104°

TWR

8002 X 130

6.3 NM

2.6 NM

3 NM

0.5

CATEGORY	A	B	C	D
LNAV MDA	880-1 853 (900-1)	880-1¼ 853 (900-1¼)	880-2½ 853 (900-2½)	880-2¾ 853 (900-2¾)
CIRCLING	880-1¼ 852 (900-1¼)	880-2½ 852 (900-2½)	1040-3 1012 (1100-3)	

LUIS MUNOZ MARIN INTL ALTIMETER SETTING MINIMUMS

LNAV MDA	NA			
CIRCLING	1480-1¼ 1452 (1500-1¼)	1480-1½ 1452 (1500-1½)	1480-3 1452 (1500-3)	1640-3 1612 (1700-3)

HIRL Rwy 12-30 0

REIL Rwy 12 and 30 0