


WAAS CH 93608 W03A	APP CRS 038°	Rwy Ldg 4314 TDZE 1450 Apt Elev 1470
--	------------------------	---

RNAV (GPS) RWY 3
DEVILS LAKE RGNL (DVL)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet, and all MDA 80 feet, increase LNAV/VNAV all Cats visibility 1/8 mile, LNAV and Circling Cat C and D visibility 1/4 mile. Helicopter visibility reduction below 3/4 SM NA. Baro-VNAV NA when using Cando altimeter setting.

MISSED APPROACH: Climb to 3400 direct ZEVAS and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

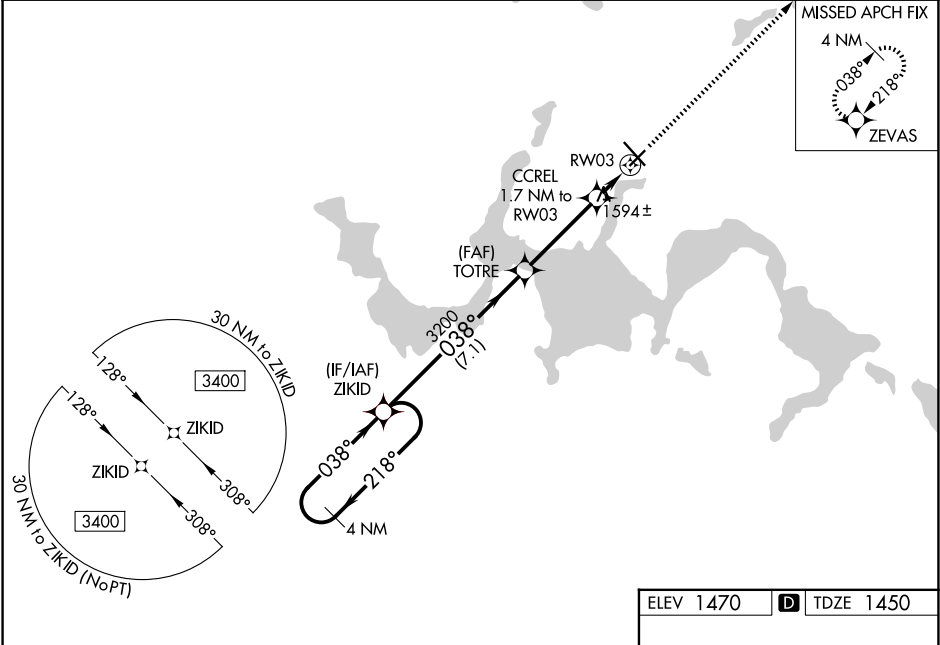

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).		3400	ZEVAS
3400 ← 218°		ZIKID		↑	⬠
038° →		TOTRE		*LNAV only.	
GP 3.00°		3200		CCREL 1.7 NM to RW03	
TCH 50		*2040		RW03	
		7.1 NM		3.6 NM	
				1.7 NM	
CATEGORY	A	B	C	D	
LPV DA	1700-1		250 (300-1)		
LNAV/VNAV DA	1714-1		264 (300-1)		
LNAV MDA	1860-1 410 (400-1)		1860-1 1/8 410 (400-1 1/8)		
CIRCLING	2000-1 530 (600-1)		2240-2 1/4 770 (800-2 1/4)		

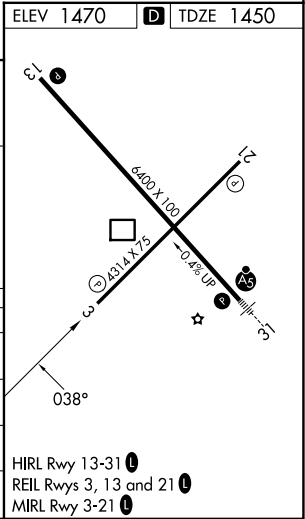

NC-1, 03 SEP 2026 to 01 OCT 2026

NC-1, 03 SEP 2026 to 01 OCT 2026