

|              |             |                     |
|--------------|-------------|---------------------|
| VORTAC EUF   | APP CRS     | Rwy Ldg             |
| <b>109.2</b> | <b>356°</b> | <b>5000</b>         |
| Chan 29      |             | TDZE <b>285</b>     |
|              |             | Apt Elev <b>285</b> |



VOR/DME RWY 36  
WEEDON FLD (EUF)

**▼** When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-36 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Rwy 36 helicopter visibility reduction below ¾ SM NA.

**▲ NA**

**MISSED APPROACH:** Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

|                        |                                         |                                 |                                 |
|------------------------|-----------------------------------------|---------------------------------|---------------------------------|
| ASOS<br><b>128.325</b> | ATLANTA APP CON ★<br><b>125.5 323.1</b> | CINC DEL<br><b>134.25 339.8</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------|-----------------------------------------|---------------------------------|---------------------------------|

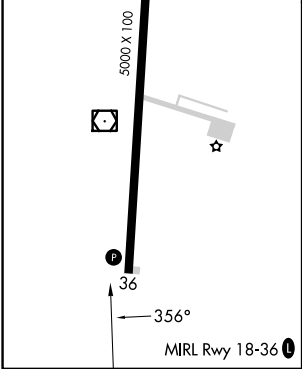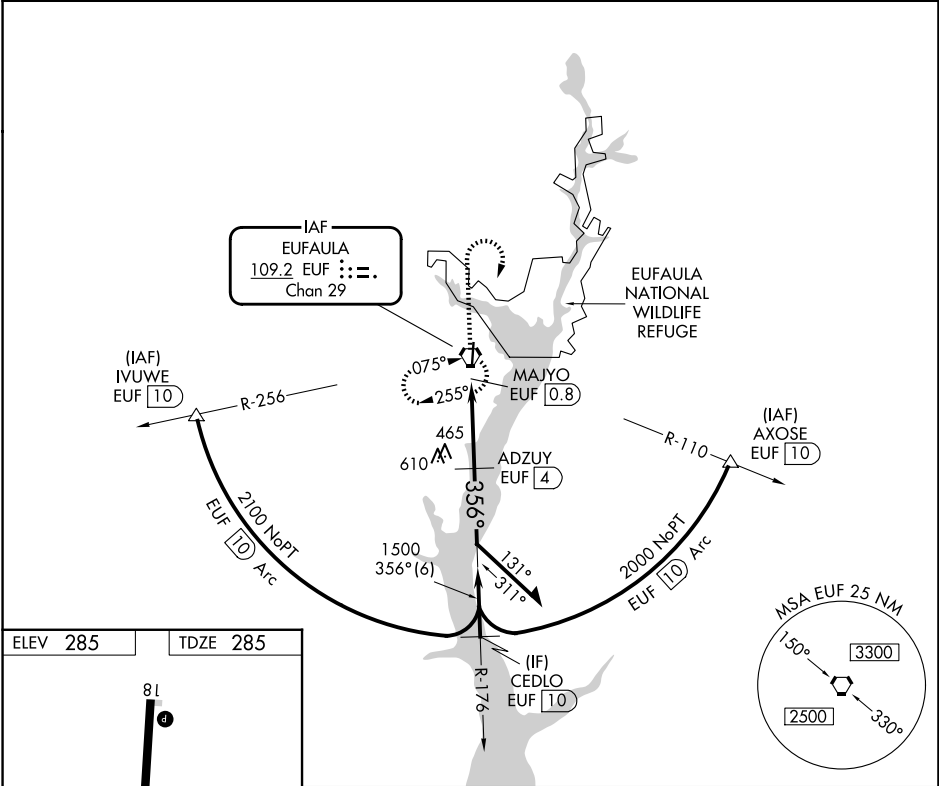

|          |       |             |                                                                                |                     |
|----------|-------|-------------|--------------------------------------------------------------------------------|---------------------|
| 1500     | 2000  | EUF         | VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).<br>EUF VORTAC | Remain within 10 NM |
|          |       |             |                                                                                |                     |
| CATEGORY | A     | B           | C                                                                              | D                   |
| S-36     | 780-1 | 495 (500-1) | 780-1 ¾                                                                        | 495 (500-1 ¾)       |
| CIRCLING | 920-1 | 635 (700-1) | 1060-2 ¼                                                                       | 1060-2 ½            |
|          |       |             | 775 (800-2 ¼)                                                                  | 775 (800-2 ½)       |

SE-4, 03 SEP 2026 to 01 OCT 2026

SE-4, 03 SEP 2026 to 01 OCT 2026