WAAS	APP CRS	Rwy Ldg	3999
CH 86430	321°	TDZE	1028
W32A		Apt Elev	1034

RNAV (GPS) RWY 32

MONTEVIDEO-CHIPPEWA COUNTY (MVE)

Circling to Rwy 14 NA at night. Baro-VNAV NA when using Granite Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -30°C (-22°F) or above 54°C (130°F). When local altimeter setting not received, use Granite Falls altimeter setting and increase LPV DA to 1270 feet; increase LNAV/VNAV DA to 1464 feet and increase visibility all Cats ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cats C/D ⅛ SM and Circling visibility Cats C/D ¼ SM. DME/DME RNP -0.3 NA. Circling to Rwy 3-21 NA. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3400 direct ZARTU and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.675	125.5 323.1	122.8 (CTAF) L

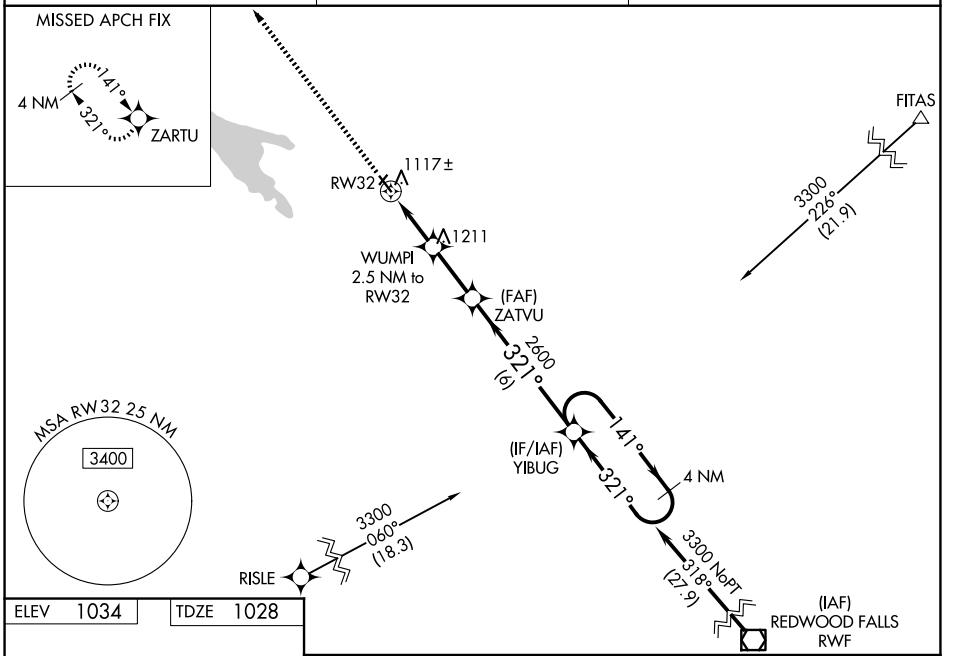

ELEV 1034	TDZE 1028

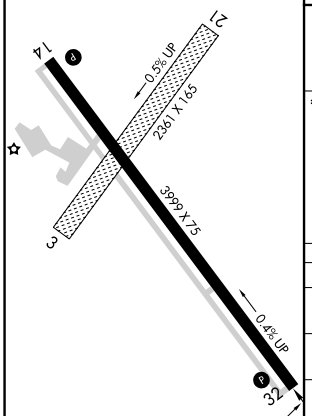

REIL Rwys 14 and 32 L
MIRL Rwy 14-32 L

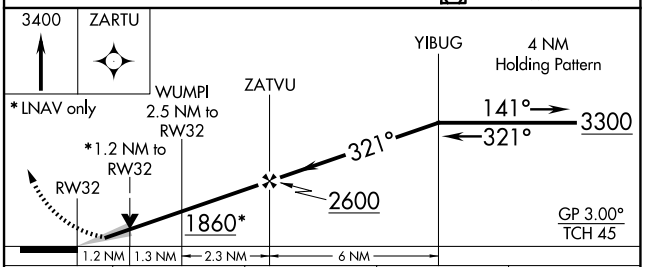

CATEGORY	A	B	C	D
LPV DA	1234-1 206 (200-1)			
LNAV/VNAV DA	1428-1⅜ 400 (400-1⅜)			
LNAV MDA	1420-1 392 (400-1)		1420-1⅛ 392 (400-1⅛)	
CIRCLING	1560-1 526 (600-1)		1700-1¾ 666 (700-1¾)	1700-2 666 (700-2)

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026