


WAAS CH 93536 W09A	APP CRS 094°	Rwy Ldg TDZE 38 Apt Elev 38	4004
--	------------------------	---	-------------


RNAV (GPS) RWY 9
WALLACE-PENDER (ACZ)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct EJABI and hold.
▼ NA Rwy 9 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. When local altimeter not received, use Kenansville altimeter setting. Straight-in and Circling Rwy 9 NA at night.	

AWOS-3P 121.07	WILMINGTON APP CON ★ 135.75 317.425	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

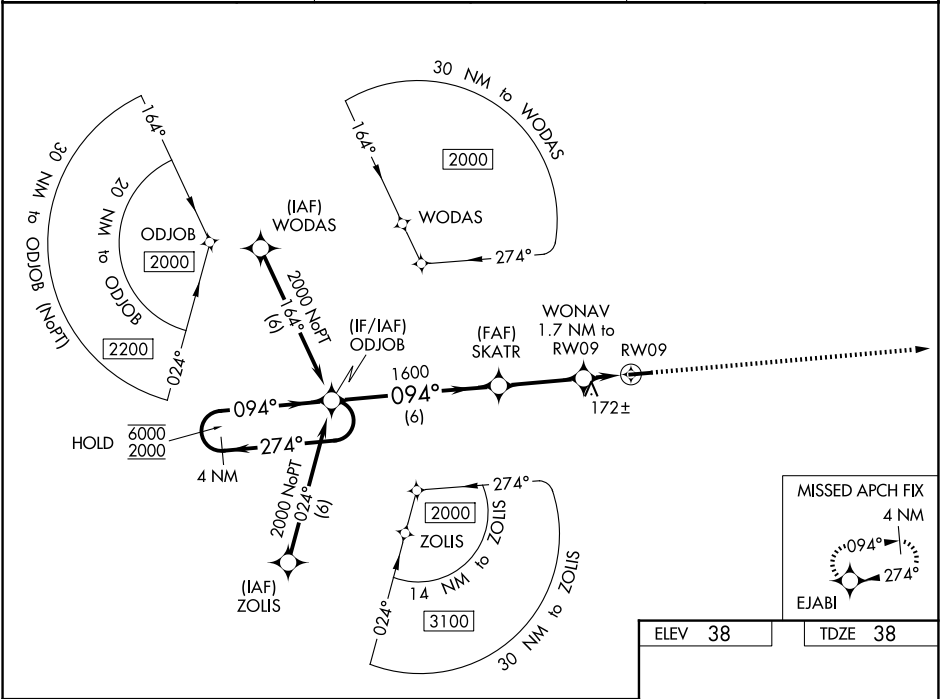

4 NM Holding Pattern				VGSI and RNAV glidepath not coincident (VGSI Angle 3.13/TCH 40).		2000	EJABI
6000 2000 ← 274° 094° → 094° 1600 620 6 NM 3.1 NM 1.7 NM				SKATR 1600		WONAV 1.7 NM to RW09	RW09
GP 3.00° TCH 51							
CATEGORY	A	B	C	D			
LPV DA	401-1		363 (400-1)				
LNAV/VNAV DA	538-1½		500 (500-1½)				
LNAV MDA	500-1 462 (500-1)		500-1¾ 462 (500-1¾)				
CIRCLING	620-1 582 (600-1)		820-2¼ 782 (800-2¼)		820-2½ 782 (800-2½)		

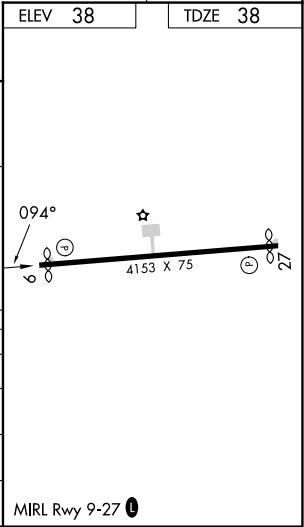

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026