WAAS	APP CRS	Rwy Ldg	5003
CH 49206	254°	TDZE	647
W26A		Apt Elev	647

RNAV (GPS) RWY 26
MASON COUNTY (LDM)

RNP APCH-GPS.

Circling Rwy 1, 19 NA at night. Rwy 26 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 2500 direct EMGEF and hold.

AWOS-3P	MINNEAPOLIS CENTER	UNICOM
119.925	120.85 322.35	123.0 (CTAF) L

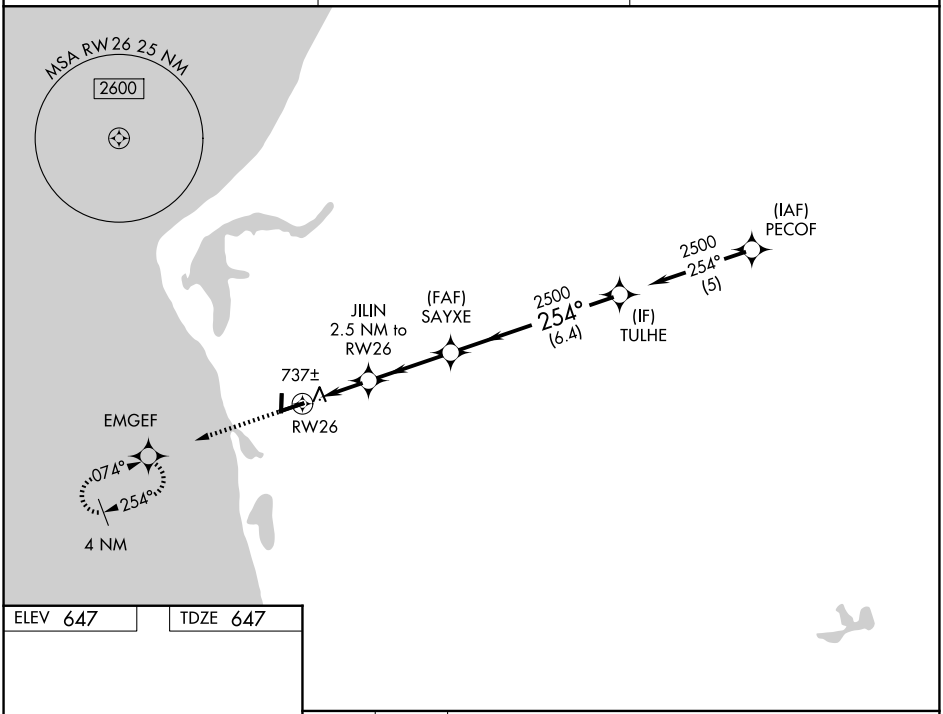

ELEV 647 TDZE 647



REIL Rwy 26 L
MIRL Rwys 8-26 and 1-19 L

2500 EMGEF

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 25).

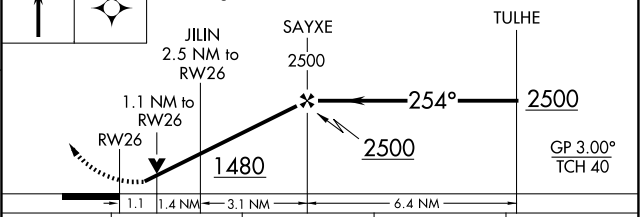

CATEGORY	A	B	C	D
LPV DA	975-1 328 (400-1)			
LNAV/VNAV DA	1020-1 373 (400-1)			
LNAV MDA	1020-1 373 (400-1)			
CIRCLING	1160-1 513 (600-1)	1200-1 553 (600-1)	1260-1¾ 613 (700-1¾)	1460-2¾ 813 (900-2¾)

EC-1, 03 SEP 2026 to 01 OCT 2026
EC-1, 03 SEP 2026 to 01 OCT 2026