RNAV (GPS) RWY 16

SHELBY COUNTY (EET)

WAAS CH 49219 W16A	APP CRS 160°	Rwy Ldg 5000 / TDZE 573 / Apt Elev 586

RNP APCH - GPS.

Rwy 16 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use BHM altimeter setting: increase LPV DA to 993 feet; increase LNAV/VNAV DA to 1238 feet; increase all MDAs 80 feet and LNAV visibility Cat C 1⅛ SM and Circling visibility Cat C ¼ SM. Baro-VNAV NA when using BHM altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct CABVU and hold.

ASOS	BIRMINGHAM APP CON	CLNC DEL	UNICOM
134.325	123.8 256.8	121.725 (GCO)	122.7 (CTAF) L

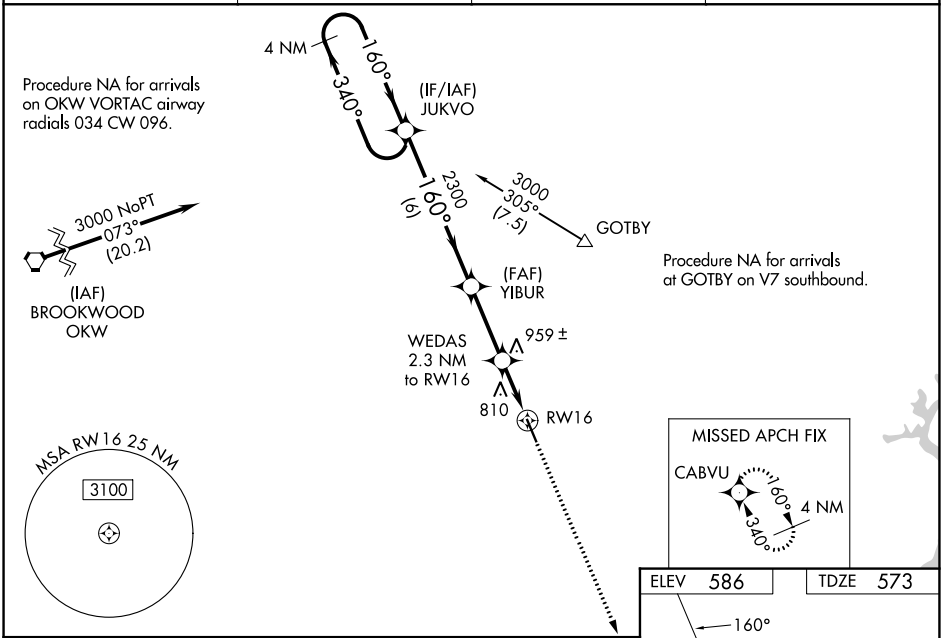

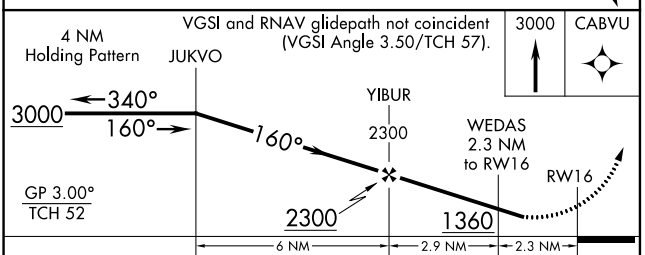

CATEGORY	A	B	C	D
LPV DA	931-1¼ 358 (400-1¼)			
LNAV/VNAV DA	1176-2 603 (600-2)			
LNAV MDA	1220-1 647 (700-1)		1220-1⅞ 647 (700-1⅞)	1220-2 647 (700-2)
CIRCLING	1220-1 634 (700-1)		1340-2¼ 754 (800-2¼)	1580-3 994 (1000-3)

SE-4, 03 SEP 2026 to 01 OCT 2026
SE-4, 03 SEP 2026 to 01 OCT 2026