

WAAS
CH **70705**
W05A

APP CRS
051°

Rwy Ldg
TDZE **193**
Apt Elev **193**

RNAV (GPS) RWY 5

TRI CITIES EXEC/DINWIDDIE COUNTY (PTB)

RNP APCH - GPS.

▼


⚠

Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats and LNAV Cat A and B.
Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

ODALS

MISSED APPROACH:
Climb to 2000 direct
ONIKE and hold.

AWOS-3 133.325	POTOMAC APP CON 126.75 307.2	GCO 135.075	UNICOM 122.7 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

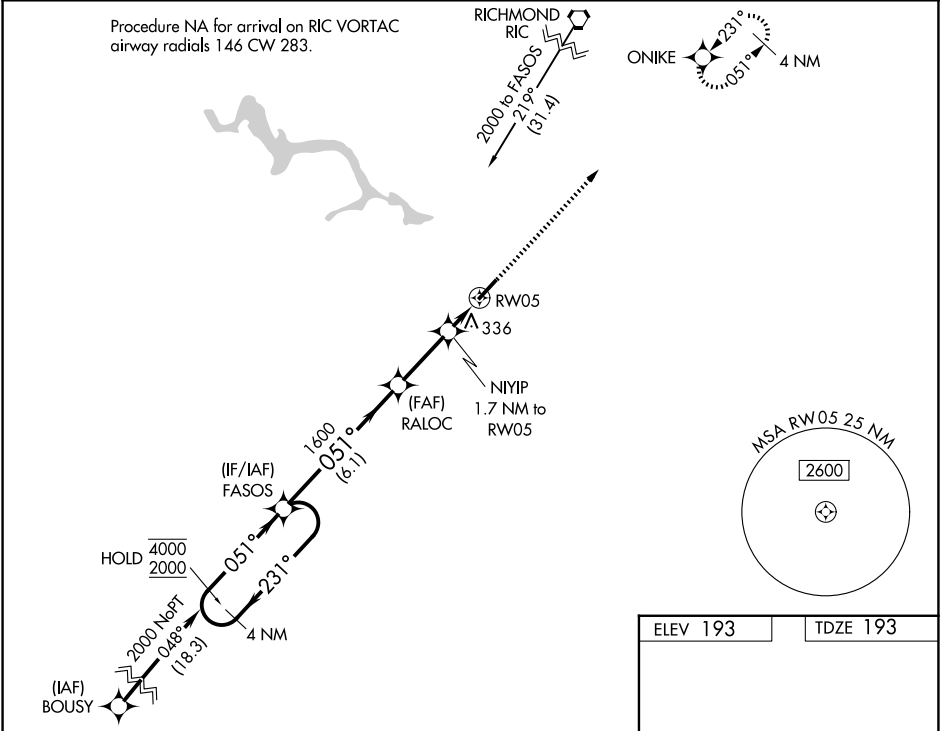

4 NM
Holding Pattern

FASOS

RALOC

NIYIP
1.7 NM to
RW05

2000

ONIKE

4000
2000

GP 3.00
TCH 42

1600

760

1.1 NM
to RW05

1.1 NM

6.1 NM

2.6 NM

0.5 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	511-1	318 (400-1)		NA
LNAV/VNAV DA	597-1	404 (500-1)		NA
LNAV MDA	600-1	407 (500-1)		NA
CIRCLING	680-1	487 (500-1)	760-1½ 567 (600-1½)	NA

MIRL Rwy 5-23 0

REIL Rwy 23 0