RNAV (GPS) RWY 34

CREVE COEUR (1H0)

WAAS	APP CRS	Rwy Idg	4500
CH 93905	338°	TDZE	462
W34A		Apt Elev	462

RNP APCH.

Use St Louis Lambert Intl altimeter setting. Baro-VNAV NA. Circling Rwy 16 NA at night. Circling NA to Rwys 7 and 25. Rwy 34 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2700 direct AJUBA and hold.

ST. LOUIS APP CON	UNICOM
126.5 254.3	122.8 (CTAF)

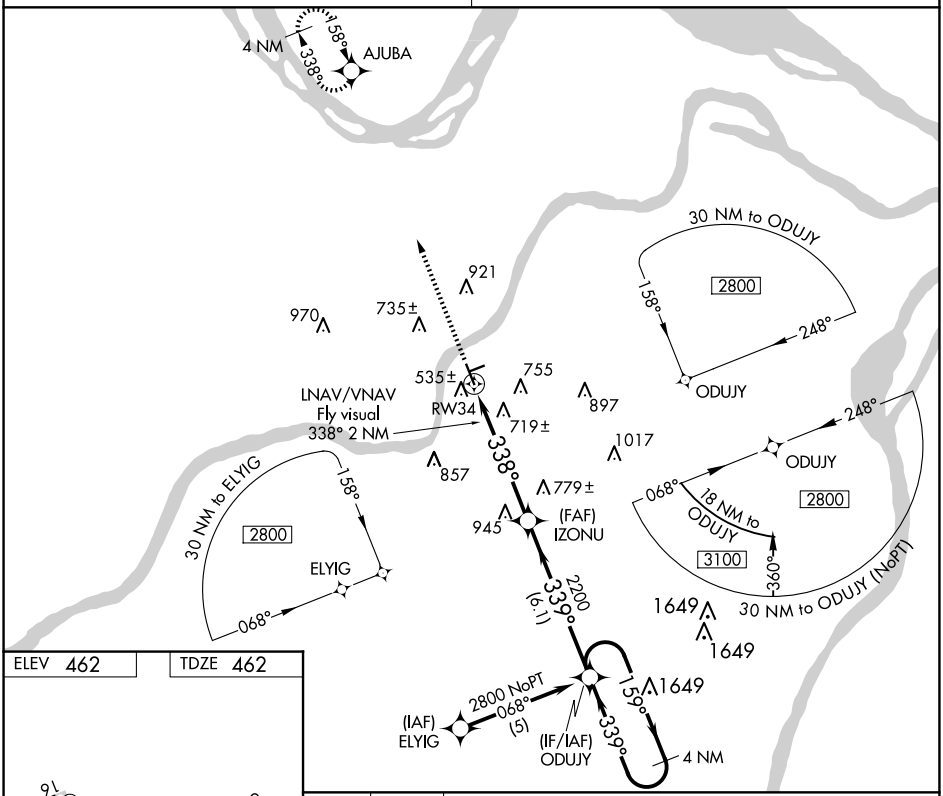

ELEV 462 TDZ 462

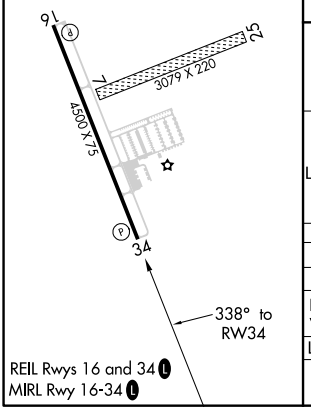

2700 AJUBA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).

4 NM Holding Pattern

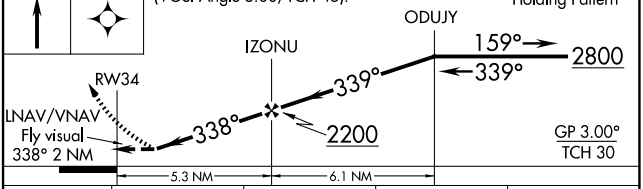

CATEGORY	A	B	C	D
LPV DA	809-1¼ 347 (400-1¼)		NA	
LNAV/VNAV DA	1131-2 669 (700-2)		NA	
LNAV MDA	1080-1 618 (700-1)		NA	
CIRCLING	1080-1 618 (700-1)	1120-1 658 (700-1)	NA	

NC-3, 03 SEP 2026 to 01 OCT 2026
NC-3, 03 SEP 2026 to 01 OCT 2026