


WAAS CH 40318 W35A	APP CRS 354°	Rwy Ldg TDZE 648 Apt Elev 657
--	------------------------	---

RNAV (GPS) RWY 35
CHESTER CATAWBA RGNL (DCM)


⚠ Circling to Rwy 5-23 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rock Hill altimeter setting and increase all DA 33 feet and all MDAs 40 feet; increase LPV, LNAV/VNAV all Cals and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Rock Hill altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
SUNYO and hold.

AWOS-3 120.975	CHARLOTTE APP CON 120.05 307.8	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

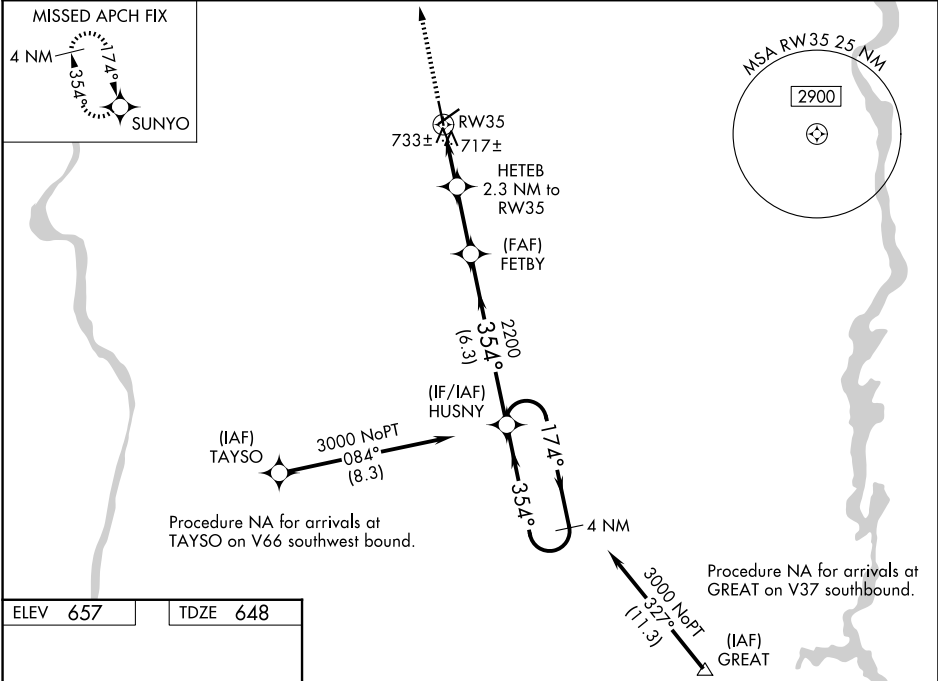

ELEV 657	TDZE 648
-----------------	-----------------

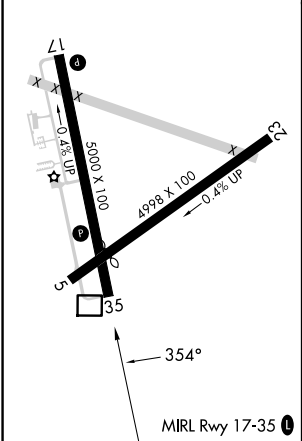

3000	SUNYO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).		4 NM Holding Pattern
		HETEB 2.3 NM to RW35	FETBY 2200	HUSNY
*LNAV only.				
				

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026