RNAV (GPS) RWY 26

NORTHUMBERLAND COUNTY (N79)

WAAS	APP CRS	Rwy Ldg	3297
CH 50424	264°	TDZE	881
W26A		Apt Elev	881

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Selinsgrove altimeter setting. Rwy 26 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Selinsgrove altimeter setting and increase LPV DA to 1529 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1651 feet and all visibilities ⅝ SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM.

NA

MISSED APPROACH: Climb to 3400 direct YUTYO and hold, continue climb-in-hold to 3400.

AWOS-3	HARRISBURG APP CON	UNICOM	
119.175	118.25 269.45	122.8 (CTAF)	121.8 L

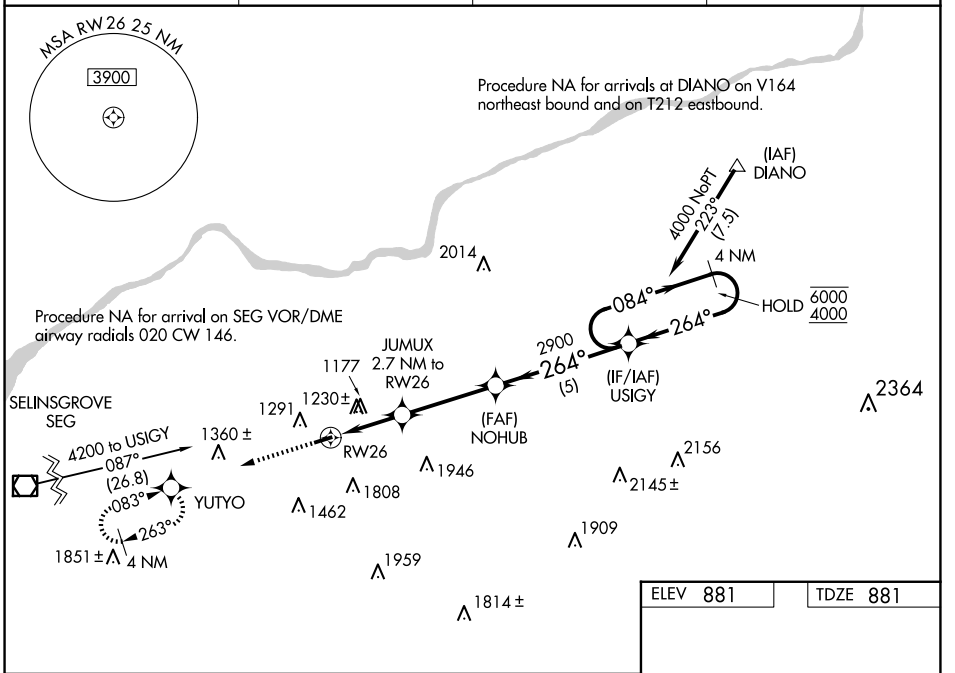

ELEV 881	TDZE 881

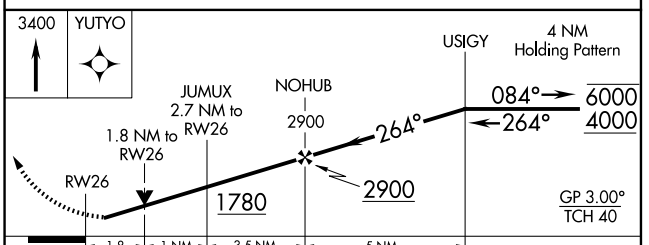



CATEGORY	A	B	C	D
LPV DA	1437-1⅝ 556 (600-1⅝)			NA
LNAV/VNAV DA	1559-1⅞ 678 (700-1⅞)			NA
LNAV MDA	1480-1 599 (600-1)		1480-1¾ 599 (600-1¾)	NA
CIRCLING	1820-1¼ 939 (1000-1¼)	1880-1½ 999 (1000-1½)	2120-3 1239 (1300-3)	NA

MIRL Rwy 8-26 L
REIL Rwys 8 and 26 L

NE-4, 03 SEP 2026 to 01 OCT 2026
NE-4, 03 SEP 2026 to 01 OCT 2026