

WAAS CH 90200 W28A	APP CRS 277°	Rwy Ldg TDZE Apt Elev	5002 599 602
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

SAGINAW COUNTY/H W BROWNE (HYX)

⚠


⚠

Inop table does not apply to LPV DA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling NA for Cat C north of Rwy 10-28. Circling Rwy 5, 23 NA at night. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM.

MALSF

MISSED APPROACH:
Climb to 2800 direct
CULAK and hold.

AWOS-3P 118.325	GREAT LAKES APP CON★ 120.95 235.625	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

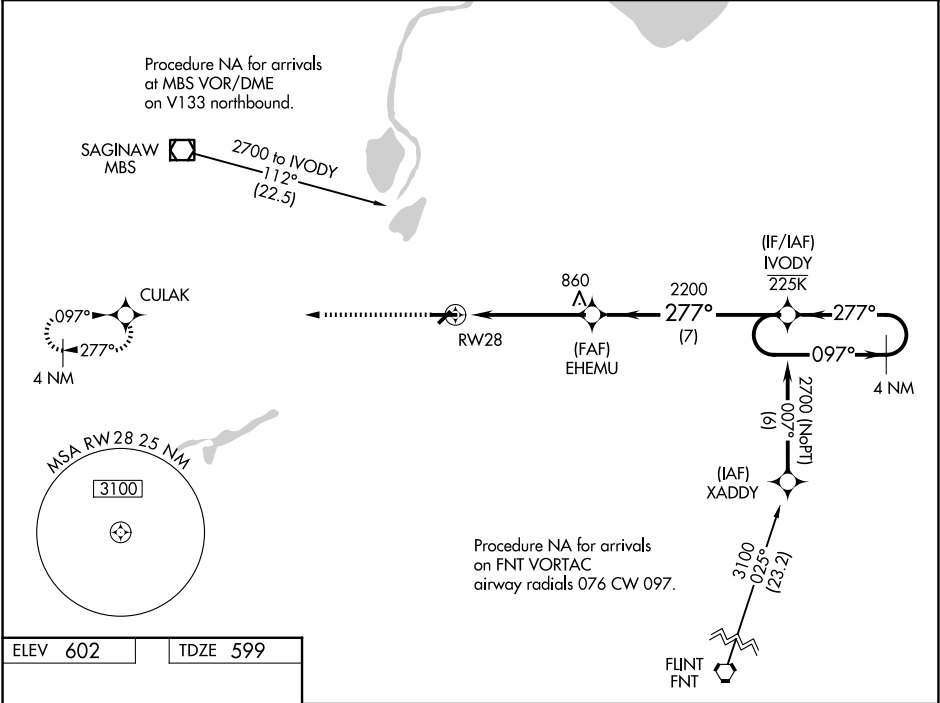

ELEV 602 TDZE 599

REIL Rwy 10 0
HIRL Rwy 10-28 0
MIRL Rwy 5-23 0

2800 CULAK	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 44).			
↑	4 NM Holding Pattern			
*LNAV only	EHEMU 2200 IVDY 277° 097° 2700			
	GP 3.00° TCH 44			
	1.4 3.5 NM 7 NM			
CATEGORY	A	B	C	D
LPV DA	804-¾ 205 (300-¾)			NA
LNAV/VNAV DA	849-¾ 250 (300-¾)			NA
LNAV MDA	1080-¾ 481 (500-¾)		1080-1½ 481 (500-1½)	NA
CIRCLING	1100-1 498 (500-1)		1460-2½ 858 (900-2½)	NA

EC-1, 03 SEP 2026 to 01 OCT 2026

EC-1, 03 SEP 2026 to 01 OCT 2026