

WAAS
CH **97519**
W17A

APP CRS
174°

Rwy Idg
TDZE
Apt Elev
3501
1030
1030

RNAV (GPS) RWY 17

BLACKWELL-TONKAWA MUNI (BKN)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 17 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ponca City altimeter setting and increase all DA 31 feet and all MDA 40 feet and LNAV Cat C visibility ¼ mile. Baro-VNAV NA when using Ponca City altimeter setting.

MISSED APPROACH: Climb to 2800 direct IOLLA and hold.

AWOS-3PT 120.575	KANSAS CITY CENTER 127.8 319.1	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

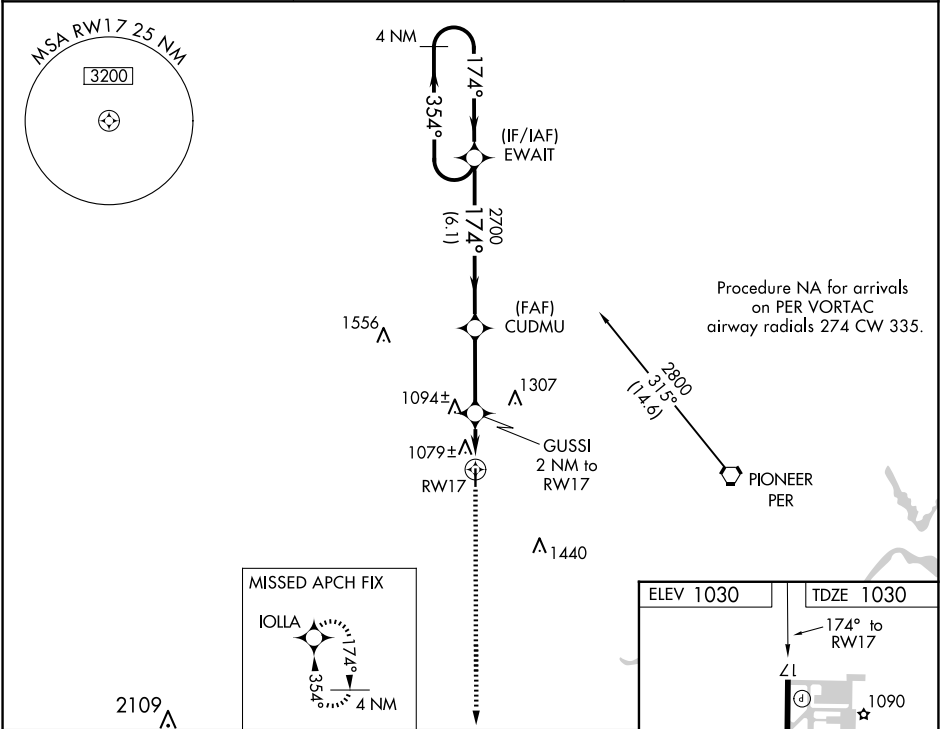

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/40).				
2800 ← 354° → 174° → 174° → 2700 → *1700 → RW17				
GP 3.00° TCH 40°				
6.1 NM → 3.1 NM → 2 NM				
CATEGORY	A	B	C	D
LPV DA	1280-1	250 (300-1)		NA
LNAV/VNAV DA	1376-1¼	346 (400-1¼)		NA
LNAV MDA	1400-1	370 (400-1)		NA

