

WAAS CH 61308 W18A	APP CRS 179°	Rwy Ldg 6500 TDZE 0 Apt Elev 0
--	------------------------	---

RNAV (GPS) RWY 18

SOUTH LAFOURCHE LEONARD MILLER JR (G.A.O)



RNP APCH - GPS.

⚠

Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase LPV DA to 396 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 361 feet, visibility Cats A and B ¾ SM and Cats C and D ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ¾ SM and Circling visibility Cats C and D ½ SM. Baro-VNAV and VDP NA when using Louis Armstrong New Orleans Intl altimeter setting.

MISSED APPROACH:
Climb to 520 then climbing right turn to 2000 direct HIKEN and hold.

AWOS-3PT 118.175	NEW ORLEANS APP CON 120.85 256.9	CINC DEL 120.85	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------	---------------------------------

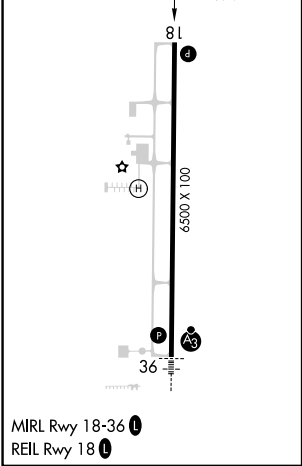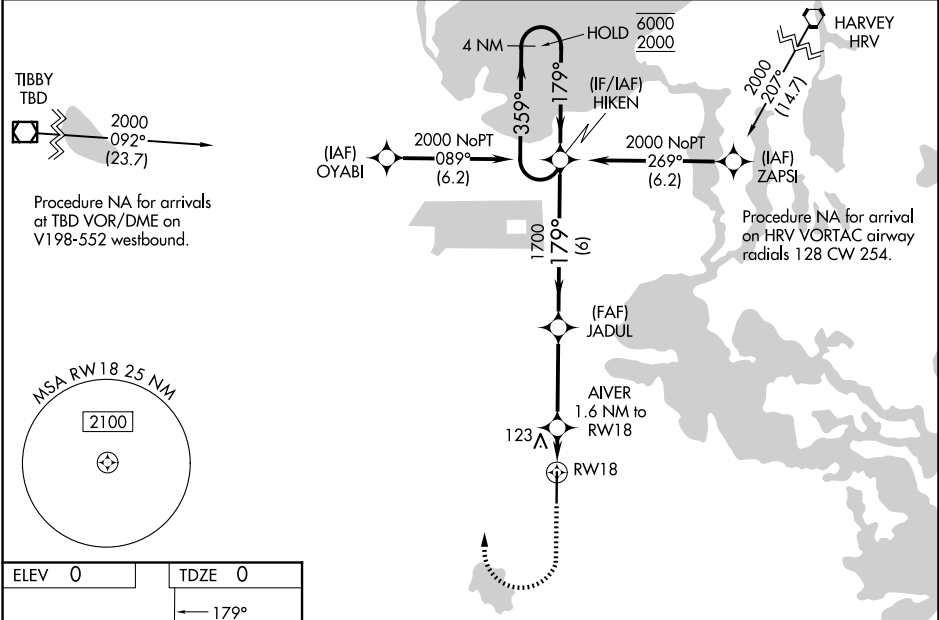

520 ↑		2000 		HIKEN 		4 NM Holding Pattern			
 RW18		AVER 1.6 NM to RW18		JADUL 1700		HIKEN 359° → 6000 ← 179° 2000		GP 3.00° TCH 51	
1.1		0.5		3.6 NM		6 NM			
CATEGORY		A		B		C		D	
LPV DA		319-1 319 (400-1)							
LNAV/VNAV DA		284-7 ⁸		284 (300-7 ⁸)		284-1		284 (300-1)	
LNAV MDA		380-1		380 (400-1)		380-1 ³ ₄		380-2	
						380 (400-1 ³ ₄)		380 (400-2)	
CIRCLING		440-1		560-1		640-1 ³ ₄		640-2	
		440 (500-1)		560 (600-1)		640 (700-1 ³ ₄)		640 (700-2)	