

WAAS CH 69608 W36A	APP CRS 359°	Rwy Ldg 6500 TDZE -2 Apt Elev 0
--	------------------------	--

RNAV (GPS) RWY 36

SOUTH LAFOURCHE LEONARD MILLER JR (G.A.O)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C and D visibility to 1 SM. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase LPV DA to 275 feet, LNAV/VNAV DA to 325 feet and all MDA 80 feet and increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C and D visibility ½ SM and Circling Cat C and D visibility ½ SM. For inop ALS, when using Louis Armstrong New Orleans Intl altimeter setting, increase LPV and LNAV/VNAV all Cats visibility ¾ SM. Baro-VNAV and VDP NA when using Louis Armstrong New Orleans Intl altimeter setting.

SSALR

MISSED APPROACH:
Climb to 2000 direct
HIKEN and hold.

AWOS-3PT 118.175	NEW ORLEANS APP CON 120.85 256.9	CLNC DEL 120.85	UNICOM 123.0 (CTAF)
----------------------------	--	---------------------------	-------------------------------

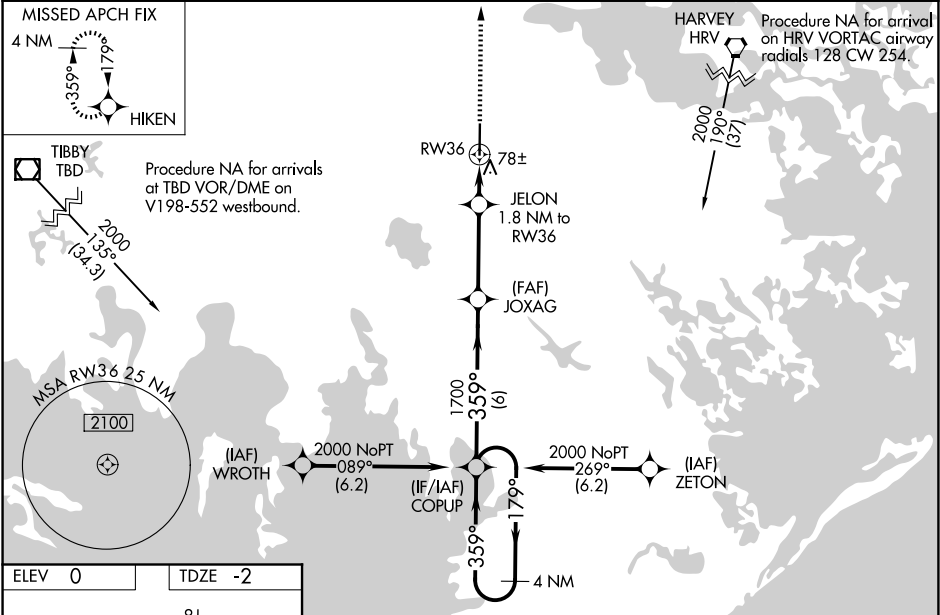

ELEV 0	TDZE -2
MIRL Rwy 18-36 REIL Rwy 18	
CATEGORY	
LPV DA	
LNAV/VNAV DA	
LNAV MDA	
CIRCLING	

SC-4, 03 SEP 2026 to 01 OCT 2026

SC-4, 03 SEP 2026 to 01 OCT 2026