RNAV (GPS) RWY 34

REEDLEY MUNI (O32)

WAAS	APP CRS	Rwy Ldg	3300
CH 99641	335°	TDZE	386
W34A		Apt Elev	386

T NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 16-34. Baro-VNAV and VDP NA when using Fresno Yosemite Intl altimeter setting. Rwy 34 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fresno Yosemite Intl altimeter setting: increase all DAs 41 feet and all visibilities ⅛ SM; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 860 then climbing left turn to 3100 direct DEICE and hold, continue climb-in-hold to 3100.

AWOS-3PT	FRESNO APP CON	UNICOM
120.175	132.35 323.25	122.7 (CTAF) L

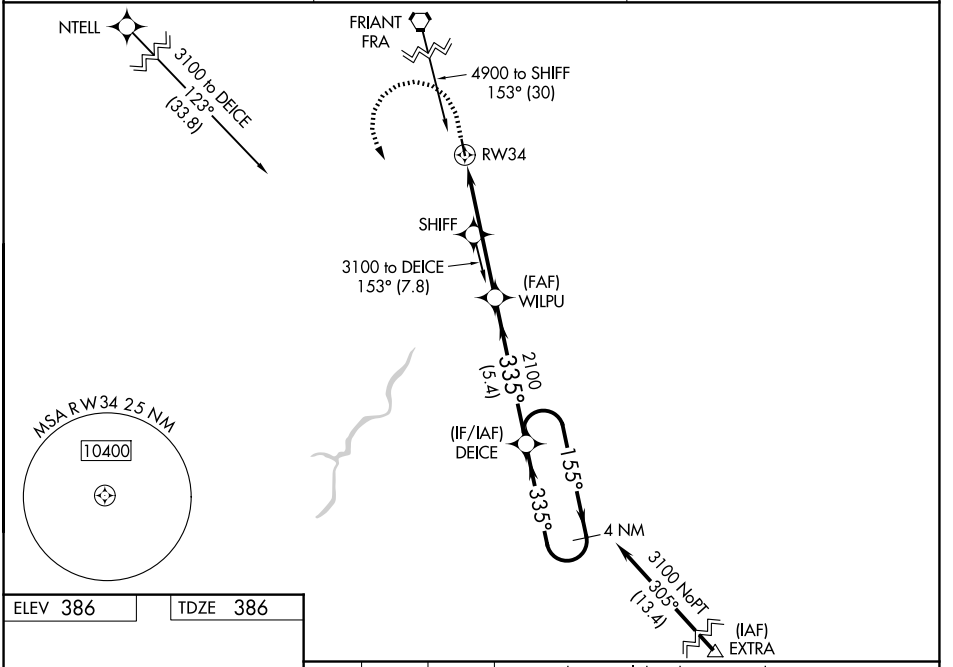

ELEV 386 | TDZE 386

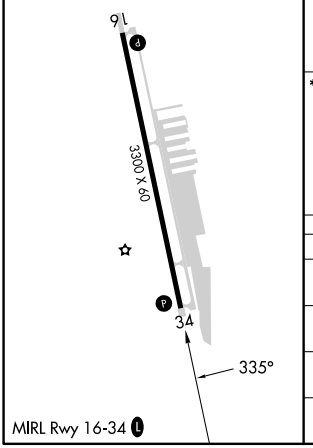

MIRL Rwy 16-34 L

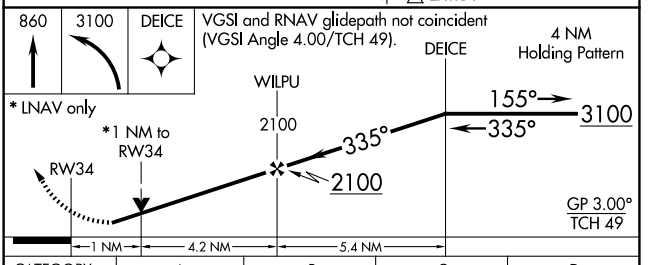

CATEGORY	A	B	C	D
LPV DA	636-¾	250 (300-¾)	NA	
LNAV/VNAV DA	740-1	354 (400-1)	NA	
LNAV MDA	860-1	474 (500-1)	NA	
CIRCLING	860-1	474 (500-1)	NA	

SW-2, 03 SEP 2026 to 01 OCT 2026
SW-2, 03 SEP 2026 to 01 OCT 2026