

WAAS CH 93715 W36A	APP CRS 001°	Rwy Ldg 5002 TDZE 835 Apt Elev 845
--	------------------------	---


RNAV (GPS) RWY 36
NORTH CENTRAL MISSOURI RGNL (MO8)

RNP APCH.

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Kirksville altimeter setting. When local altimeter setting not received, use Kirksville altimeter setting and increase all LPV and LNAV/VNAV DA to 1169 feet and increase all visibility 1/8 mile; increase all MDA 100 feet, increase LNAV Cat C/D visibility 1/4 mile, and Circling Cat C visibility 1/8 mile. Rwy 36 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 3000 direct COROS and hold.

AWOS-2 118.425	KANSAS CITY CENTER 125.25 235.975	CTAF 122.9 0
--------------------------	---	------------------------

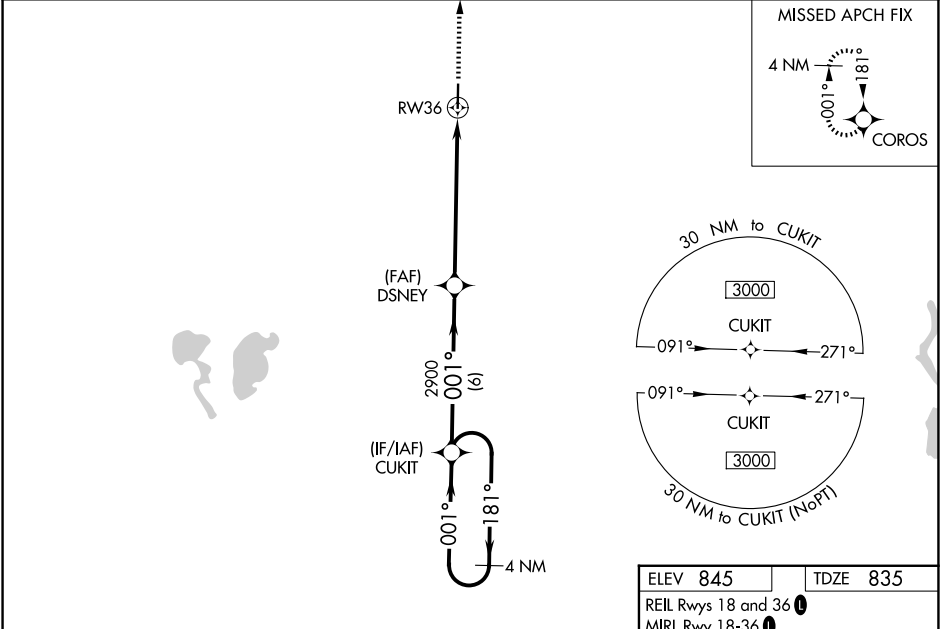

4 NM Holding Pattern CUKIT

3000 ← 181°
001° →

GP 3.00°
TCH 40


DSNEY 2900

2900

*1.4 NM to RW36 *LNAV only

6 NM 5 NM 1.4 NM

CATEGORY	A	B	C	D
LPV DA	1085-1 250 (300-1)			
LNAV/VNAV DA	1085-1 250 (300-1)			
LNAV MDA	1300-1	465 (500-1)	1300-1 3/8	465 (500-1 3/8)
CIRCLING	1300-1	455 (500-1)	1300-1 1/2 455 (500-1 1/2)	1400-2 555 (600-2)

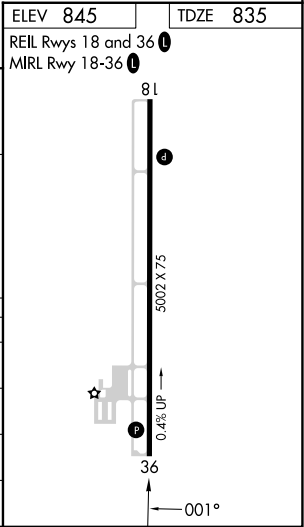

NC-3, 03 SEP 2026 to 01 OCT 2026

NC-3, 03 SEP 2026 to 01 OCT 2026