MNZNO THREE DEPARTURE (RNAV)

(MNZNO3.MNZNO) 25JUN15

ALBUQUERQUE, NEW MEXICO

ALBUQUERQUE INTL SUNPORT (ABQ)

TOP ALTITUDE: FL200

TAKEOFF MINIMUMS

Rwy 3: Standard with minimum climb of 500′ per NM to 9000. Minimum obstacle climb gradient after YUGLU is 420′ per NM to 11900.

Rwy 8: Standard with minimum climb of 515′ per NM to 9000. Minimum obstacle climb gradient after YUGLU is 420′ per NM to 11900.

NOTE: Takeoff Rwy 3, do not exceed 220K until passing 6000.
NOTE: Takeoff Rwy 8, do not exceed 220K until passing 5860.
NOTE: Do not exceed 250K until passing MNZNO.
NOTE: DME/DME/IRU or GPS required.
NOTE: For turbojet aircraft only.
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: If unable to accept climb gradient, advise ATC on initial contact.
NOTE: For non-GPS equipped aircraft ONM DME must be operational.

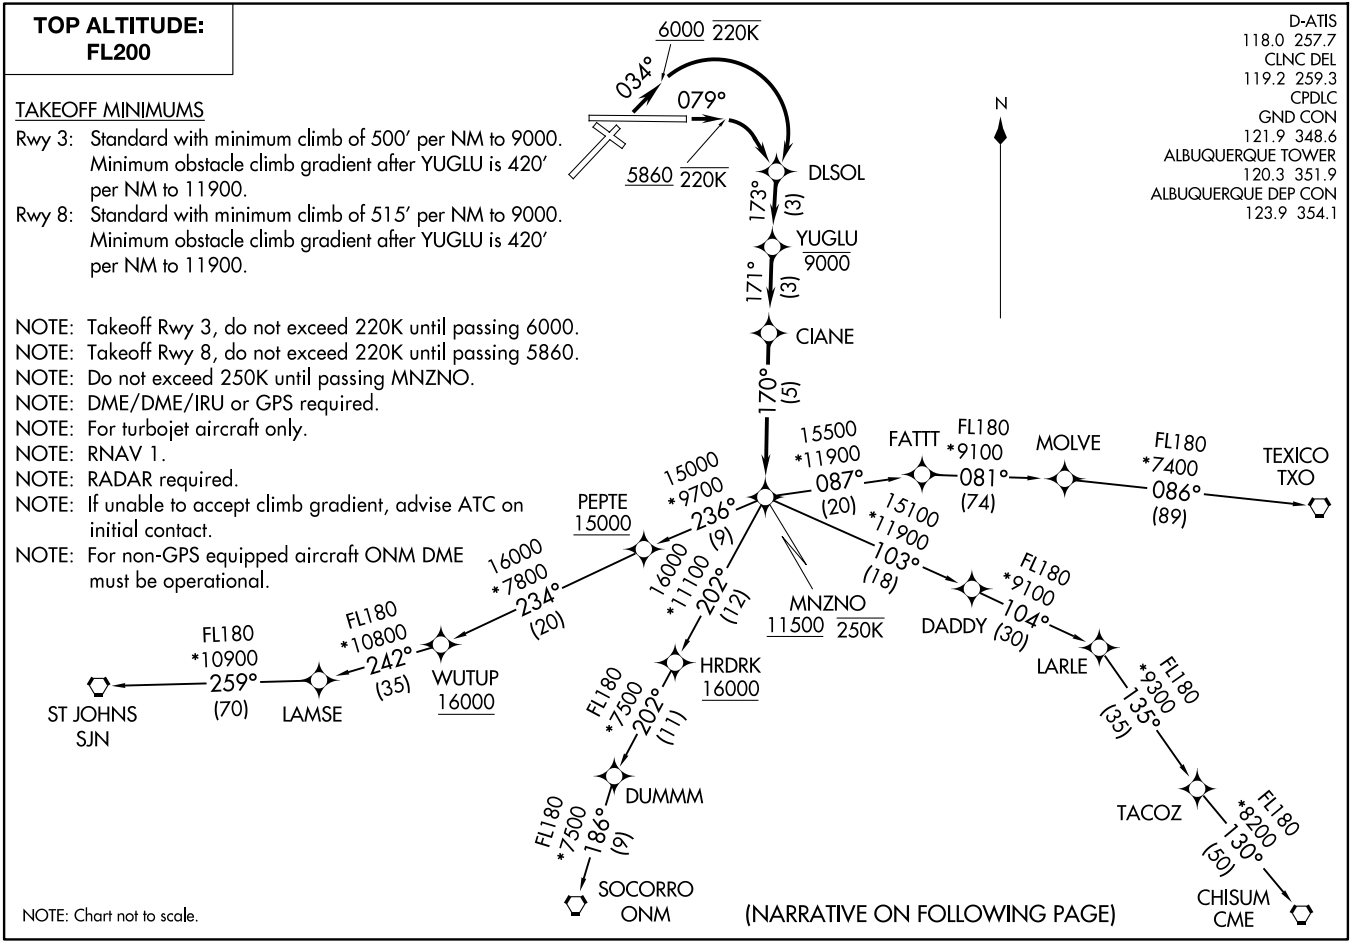

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

(MNZNO3.MNZNO) 21336

MNZNO THREE DEPARTURE (RNAV) AL-12 (FAA)

ALBUQUERQUE INTL SUNPORT (ABQ)

ALBUQUERQUE, NEW MEXICO