

LOC I-OKX 109.9	APP CRS 139°	Rwy Ldg 8006 TDZE 459 Apt Elev 459
---------------------------	------------------------	---

ILS or LOC RWY 14R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

⚠

For inop ALS, increase S-ILS 14R Cat E visibility to RVR 4000 and S-LOC 14R Cat E visibility to 1¾ mile. DME from SKE TACAN. DME use requires simultaneous reception of I-OKX and SKE DME.
* RVR 1800 authorized with use of FD or AP or HUD to DA.


ALSF-1

⬆


(A1)

MISSED APPROACH: Climb to 2200 then on TOY VORTAC R-148 to WOMUG INT/TOY 25.6 DME and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

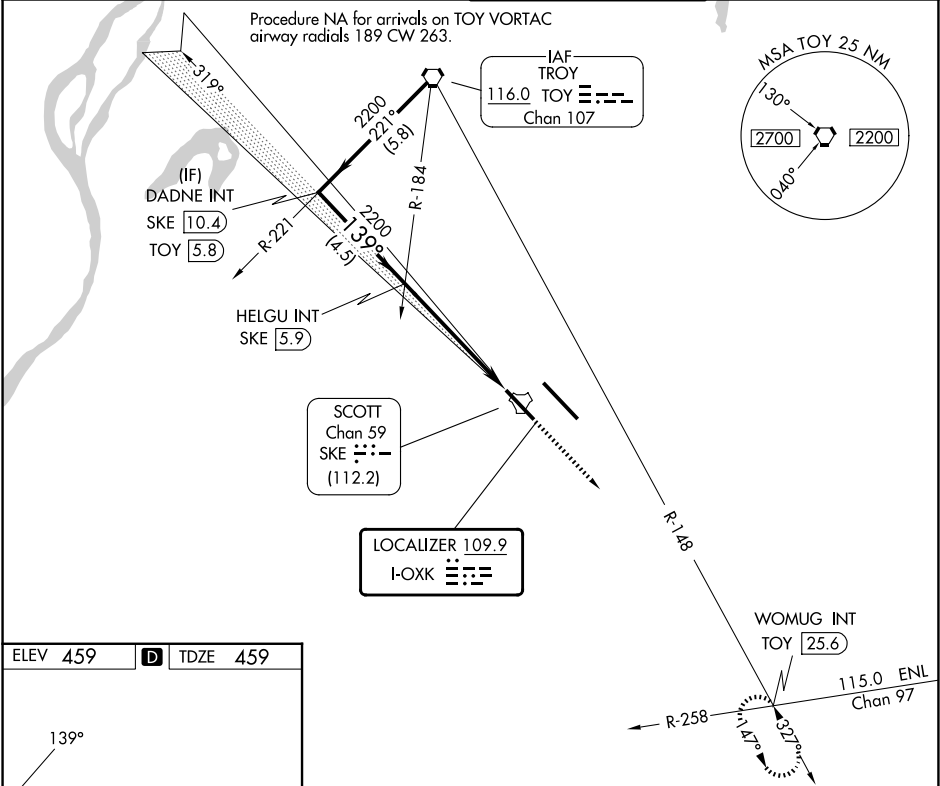

ELEV 459	D	TDZE 459
-----------------	----------	-----------------

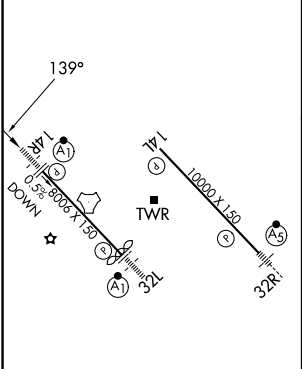

HIRL Rwy 14L-32R and 14R-32L REIL Rwy 14L					
FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

DADNE INT SKE 10.4		HELGU INT SKE 5.9		2200 ↑		TOY R-148		WOMUG INT	
2200 139°		2200		2200		SKE 0.6		GS 3.00° TCH 51	
4.5 NM		5.3 NM							
CATEGORY	A	B	C	D	E				
S-ILS 14R *	659/24 200 (200-½)								
S-LOC 14R	1040/24 581 (600-½)		1040-1¼ 581 (600-1¼)						
CIRCLING	1040-1 581 (600-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)				

EC-3, 01 OCT 2026 to 29 OCT 2026

EC-3, 01 OCT 2026 to 29 OCT 2026