

LOC I-SLN <u>108.9</u>	APP CRS 353°	Rwy Ldg 12300 TDZE 1271 Apt Elev 1288
----------------------------------	------------------------	--


ILS or LOC RWY 35
SALINA RGNL (SLN)

T For inop ALS, increase S-ILS 35 Cat E visibility to $\frac{3}{4}$ SM and S-LOC 35 Cats C/D/E to $\frac{1}{8}$ SM. Circling NA for Cats D and E southwest of Rwy 12-30.



MISSED APPROACH: Climb to 1700 then climb to 3000 direct SLN VORTAC and hold.

ATIS 120.15	KANSAS CITY CENTER 134.9 363.2	SALINA TOWER ★ 119.3 (CTAF) 257.7	GND CON 121.9 360.8	UNICOM 122.95
----------------	-----------------------------------	--------------------------------------	------------------------	------------------

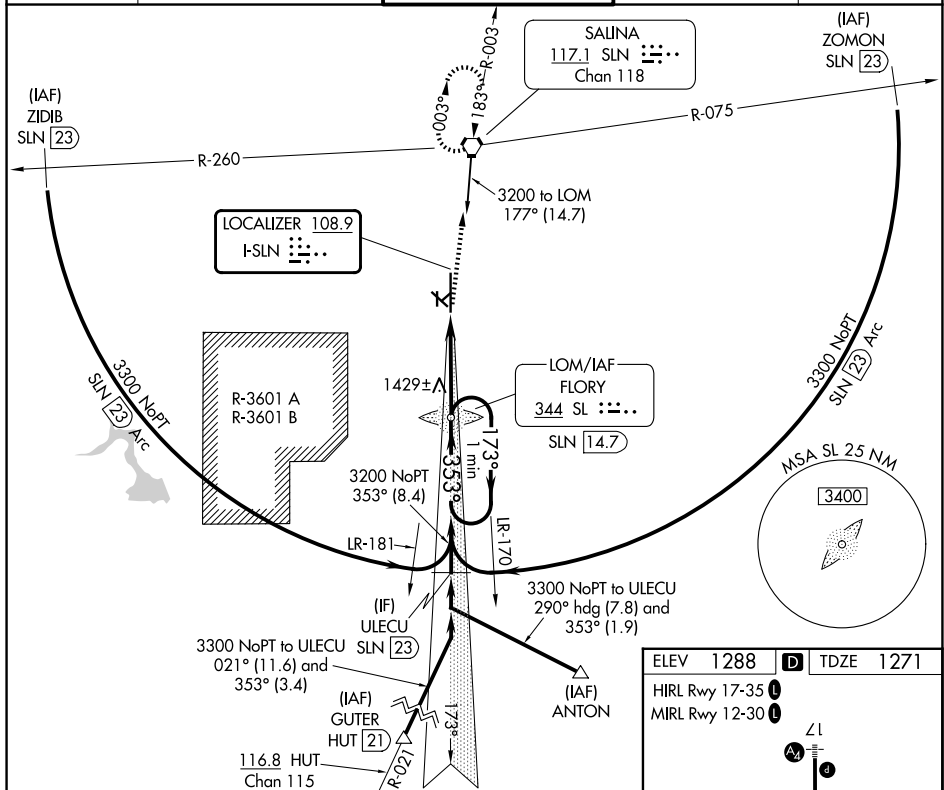

CATEGORY	A	B	C	D	E
S-ILS 35	1471-½ 200 (200-½)				
S-LOC 35	1680-½ 409 (400-½)		1680-¾ 409 (400-¾)		
CIRCLING	1820-1 532 (600-1)	1840-1 552 (600-1)	1860-1½ 572 (600-1½)	1860-2 572 (600-2)	1920-2¼ 632 (700-2¼)

