

ILS or LOC Y RWY 33

LOC I-MIZ 109.5	APCH CRS 325°	Rwy ldg 12,001
		TDZE 105
		Arpt Elev 113

(USAF)

BEALE AFB (KBAB)


RADAR or DME required

- ▼ * When ALS inop, increase RVR to 40 and vis to 3/4 mile.
** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile;
CAT CDE RVR to 60 and vis to 1 1/8 miles.
*** Circling not authorized E of Rwy 15-33.



ALSF-1

MISSED APPROACH: Climb to 3600 intercept
BAB TACAN R-326 to HAPAK and hold.

ATIS★ 124.55 273.5	NORCAL APP CON 125.4 259.1	TOWER★ 119.4 284.75	GND CON 121.6 257.75
-----------------------	-------------------------------	------------------------	-------------------------

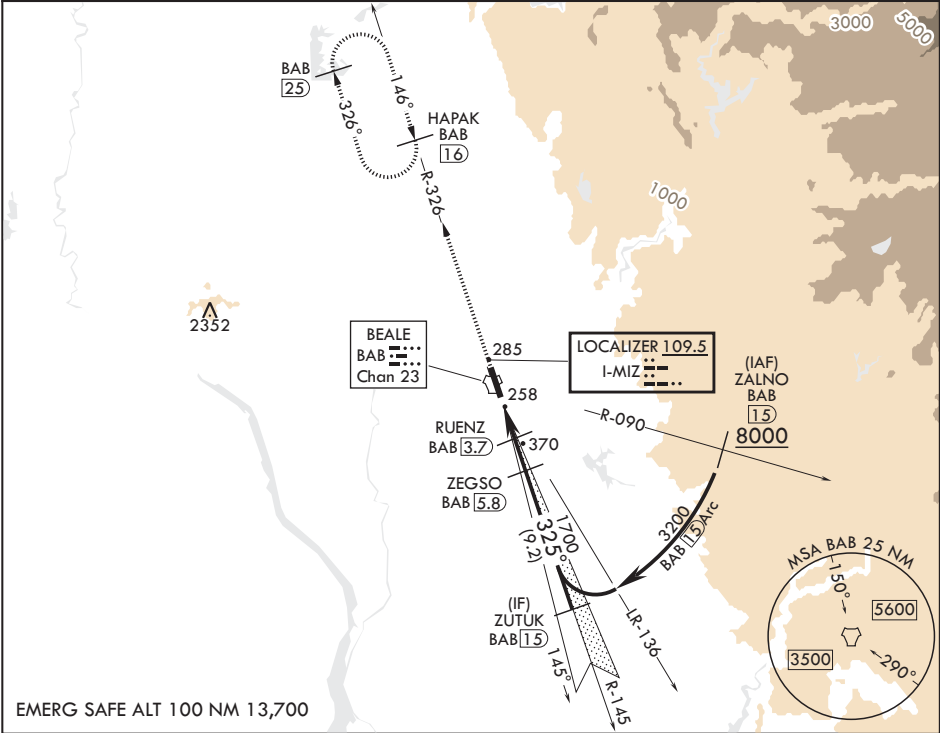

EMERG SAFE ALT 100 NM 13,700

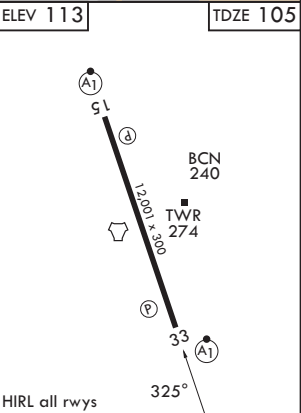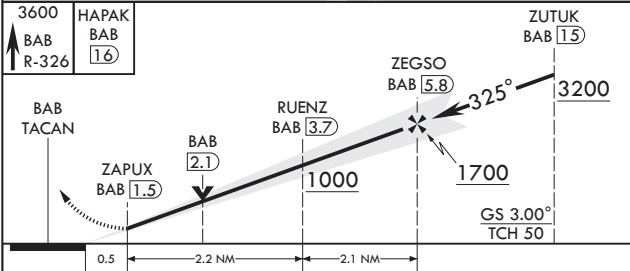

CATEGORY	A	B	C	D	E
S-ILS 33*	305/24	200	(200-1/2)		
S-LOC 33**	520/24	415 (500-1/2)	520/40	415 (500-3/4)	
CIRCLING***	600-1	487 (500-1)	600-1 1/2 487 (500-1 1/2)	800-2 1/4 687 (700-2 1/4)	800-2 1/2 687 (700-2 1/2)

ILS or LOC Y RWY 33

SW-2, 01 OCT 2026 to 29 OCT 2026

SW-2, 01 OCT 2026 to 29 OCT 2026