
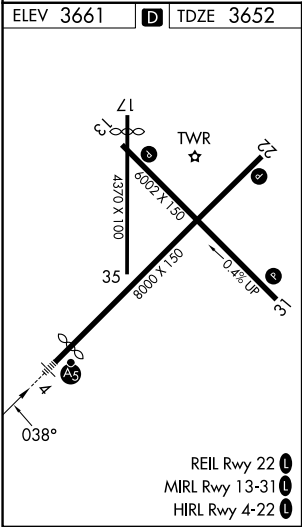


WAAS CH 90215 W04A	APP CRS 038°	Rwy Ldg TDZE 3798 3652 Apt Elev 3661
--	------------------------	--

RNAV (GPS) RWY 4

LEA COUNTY RGNL (HOB)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 4200 then climb to 6000 direct DEKEC and hold.	
Circling Rwy 17, 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.		AS		
ATIS 119.75	FORT WORTH CENTER 133.1 298.95	HOBBS TOWER ★ 120.65 (CTAF) 317.4	GND CON 121.9	UNICOM 122.95

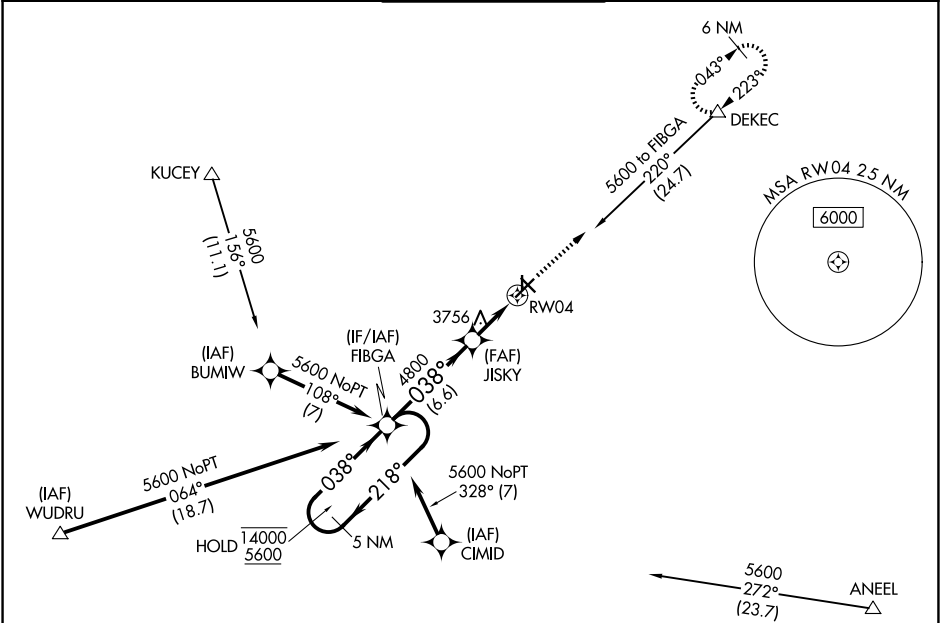

5 NM Holding Pattern		FIBGA	4200	6000	DEKEC
14000 5600		218° 038°	1 NM to RW04		
GP 3.00° TCH 48		JISKY 4800	RW04		
		6.6 NM	2.5 NM	1 NM	
CATEGORY	A	B	C	D	
LPV DA	3852-½		200 (200-½)		
LNAV/VNAV DA	3902-½		250 (300-½)		
LNAV MDA	4020-½ 368 (400-½)		4020-⅝ 368 (400-⅝)		
CIRCLING	4120-1 459 (500-1)	4160-1 499 (500-1)	4440-2¼ 779 (800-2¼)	4440-2½ 779 (800-2½)	