WAAS	APP CRS	Rwy Ldg	5600
CH 87028	355°	TDZE	310
W35A		Apt Elev	315

RNAV (GPS) RWY 35

ST MARY'S (KSM)(PASM)

RNP APCH - GPS.

Circling NA east of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Circling Rwy 7 NA at night. Baro-VNAV and VDP NA when using MOU/PAMO altimeter setting. When local altimeter setting not received, use MOU/PAMO altimeter setting and increase LPV DA to 589 feet; increase LNAV/VNAV DA to 913 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cats C and D ⅛ SM and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2600 direct YOZMO and hold.

AWOS-3P	ANCHORAGE CENTER	CTAF
128.7	124.0	122.3 L

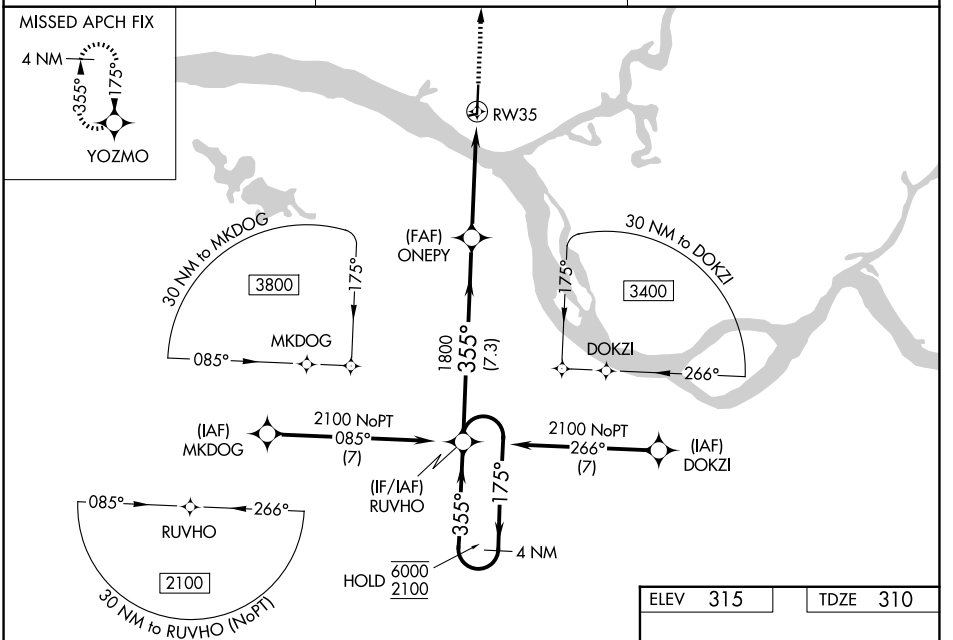

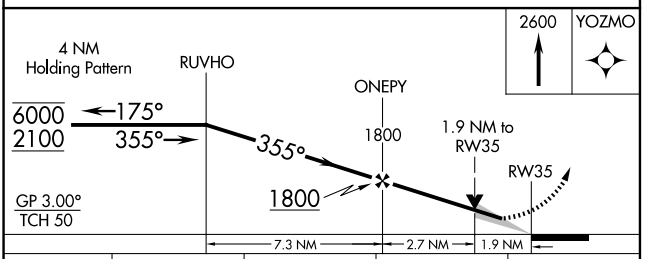

CATEGORY	A	B	C	D
LPV DA	560-1 250 (300-1)			
LNAV/VNAV DA	884-1⅝ 574 (600-1⅝)			
LNAV MDA	960-1 650 (700-1)		960-1⅞ 650 (700-1⅞)	
CIRCLING	960-1 645 (700-1)		960-1⅞ 645 (700-1⅞)	960-2 645 (700-2)

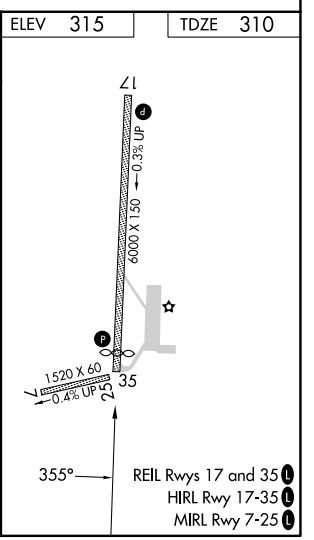

AK, 03 SEP 2026 to 29 OCT 2026
AK, 03 SEP 2026 to 29 OCT 2026