WAAS CH **50515** **W32A**	APP CRS **313°**	Rwy Idg **3600** TDZE **1608** Apt Elev **1608**

RNAV (GPS) RWY 32


ROBERTSON FLD (D55)

RNP APCH - GPS.

Circling NA to Rwys 8 and 26. Rwy 32 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Devils Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Devils Lake altimeter setting and increase LPV DA to 1983 feet; increase LNAV/VNAV DA to 2284 feet and all visibilities ¼ SM. Increase all MDAs 140 feet and LNAV visibility Cat A/C ½ SM, and Circling visibility Cat A/C ½ SM. -35°C


MISSED APPROACH: Climb to 4000 direct MEKSE and on 223° track to JAKTI and on 132° track to CIDVA and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.225	**132.15 269.6**	**122.8** (CTAF) L

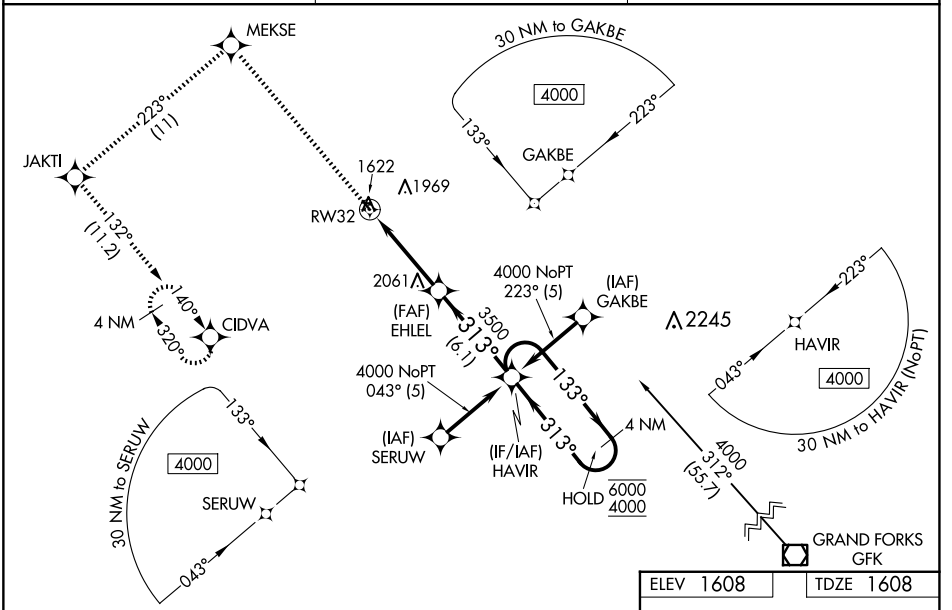


4000	MEKSE	tr 223°	JAKTI	tr 132°	CIDVA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).

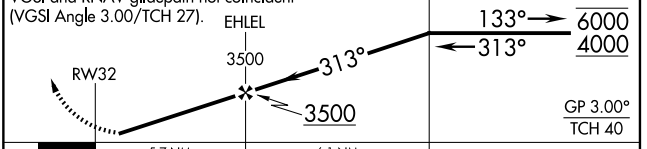

CATEGORY	A	B	C	D
LPV DA	1858-1 250 (300-1)			NA
LNAV/VNAV DA	2159-1⅝ 551 (600-1⅝)			NA
LNAV MDA	2360-1 752 (800-1)	2360-1¼ 752 (800-1¼)	2360-2 752 (800-2)	NA
CIRCLING	2360-1 752 (800-1)	2360-1¼ 752 (800-1¼)	2360-2¼ 752 (800-2¼)	NA

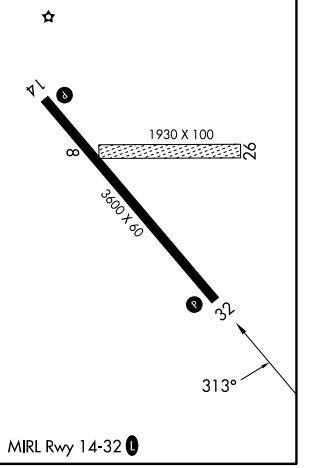

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026