RNAV (GPS) Y RWY 31R

DALLAS LOVE FLD (DAL)

WAAS	APP CRS	Rwy Ldg 6952
CH 87123	313°	TDZE 487
W31B		Apt Elev 487


RNP APCH - GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cats C and D visibility to 1⅜ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR


MISSED APPROACH: Climb to 1000 then climbing right turn to 5000 direct FINGR and hold.

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

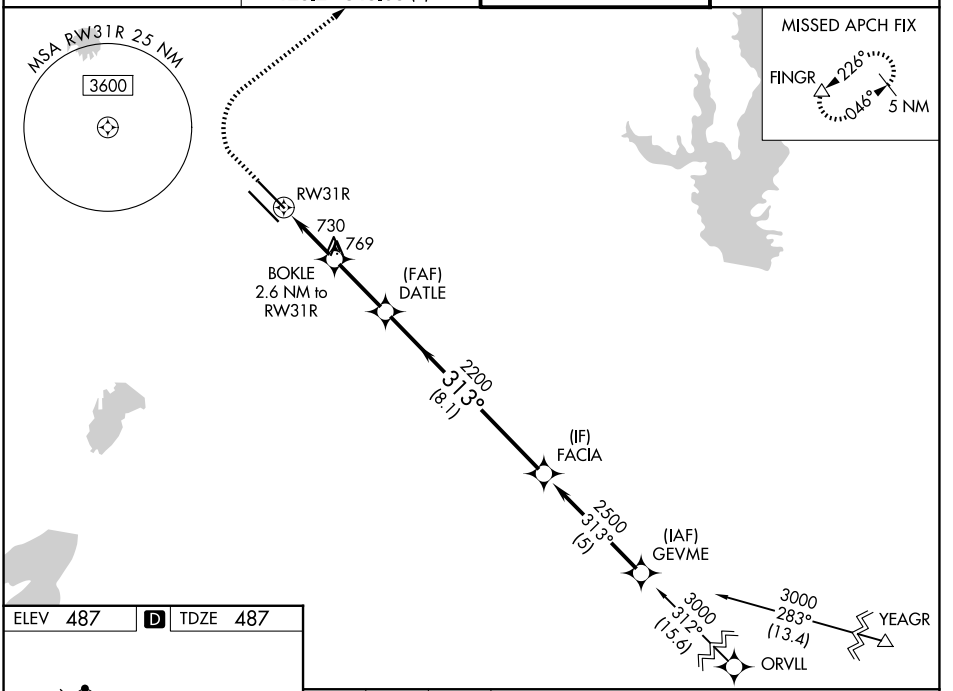

ELEV 487 | D | TDZE 487

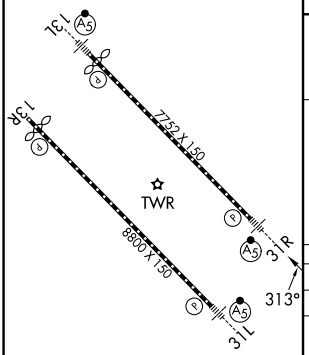

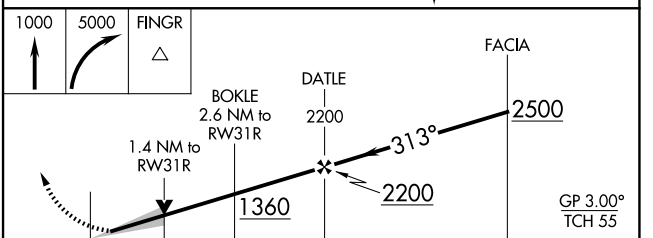

CATEGORY	A	B	C	D
LPV DA*		687/24	200 (200-½)	
LNAV/VNAV DA		980/50	493 (500-1)	
LNAV MDA	980/24	493 (500-½)	980/50	493 (500-1)
CIRCLING	1080-1 593 (600-1)	1140-1 653 (700-1)	1280-2¼ 793 (800-2¼)	1520-3 1033 (1100-3)

TDZL/RCLS Rwys 13L and 31L
HIRL Rwys 13L-31R and 13R-31L

SC-2, 26 NOV 2026 to 24 DEC 2026
SC-2, 26 NOV 2026 to 24 DEC 2026