RNAV (GPS) RWY 22

FORT BRIDGER (FBR)


WAAS CH 78234 W22A	APP CRS 224°	Rwy Ldg 6404 TDZE 7023 Apt Elev 7038


RNP APCH.

Circling NA to Rwys 7 and 25. When local altimeter setting not received, use Evanston altimeter setting and increase all MDAs 100 feet, increase LNAV Cats C and D visibility ⅛ SM, Circling Cat C visibility ¼ SM and Cat D visibility ½ SM.


MISSED APPROACH: Climb to 7500, then climbing right turn to 12000 direct EXILE and hold, continue climb-in-hold to 12000.

AWOS-3PT	SALT LAKE CENTER	UNICOM
118.8	124.35 353.5	122.8 (CTAF) L

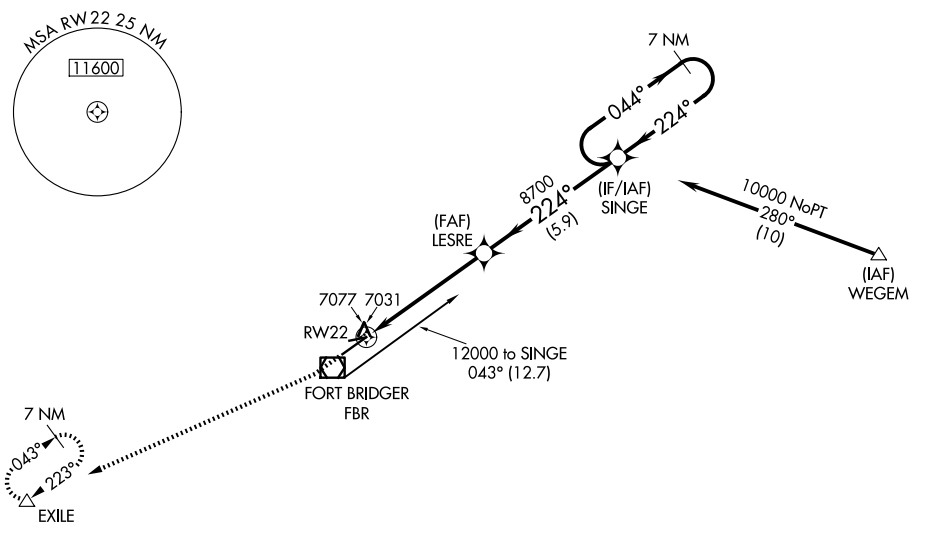

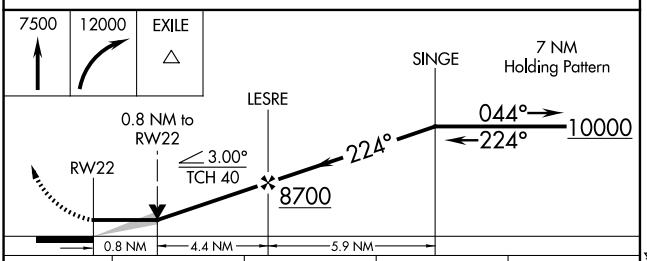

CATEGORY	A	B	C	D
LP MDA	7300-1 277 (300-1)			
LNAV MDA	7340-1 317 (400-1)			
CIRCLING	7400-1 362 (400-1)	7500-1 462 (500-1)	7660-1¾ 622 (700-1¾)	7680-2 642 (700-2)

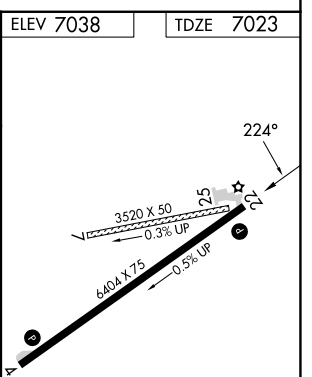

REIL Rwys 4 and 22 L
MIRL Rwy 4-22 L

NW-1, 26 NOV 2026 to 24 DEC 2026
NW-1, 26 NOV 2026 to 24 DEC 2026