ILS or LOC RWY 36

GREAT BEND MUNI (GBD)

LOC/DME I-GBD	APP CRS	Rwy Ldg	7852
111.9	356°	TDZE	1883
Chan 56		Apt Elev	1887


ADF required.


T NA When local altimeter setting not received, use LYO altimeter setting and increase S-ILS 36 DA to 2179 feet and increase all MDAs 100 feet; increase S-LOC 36 visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM; BROTO Fix Minimums: increase S-LOC 36 visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM. For inop ALS, increase S-LOC Cats C/D visibility to 1⅜ SM.


MALSR

MISSED APPROACH: Climb to 2900 then climbing left turn to 3600 direct BABSY LOM and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
119.275	118.8 322.425	122.8 (CTAF) L

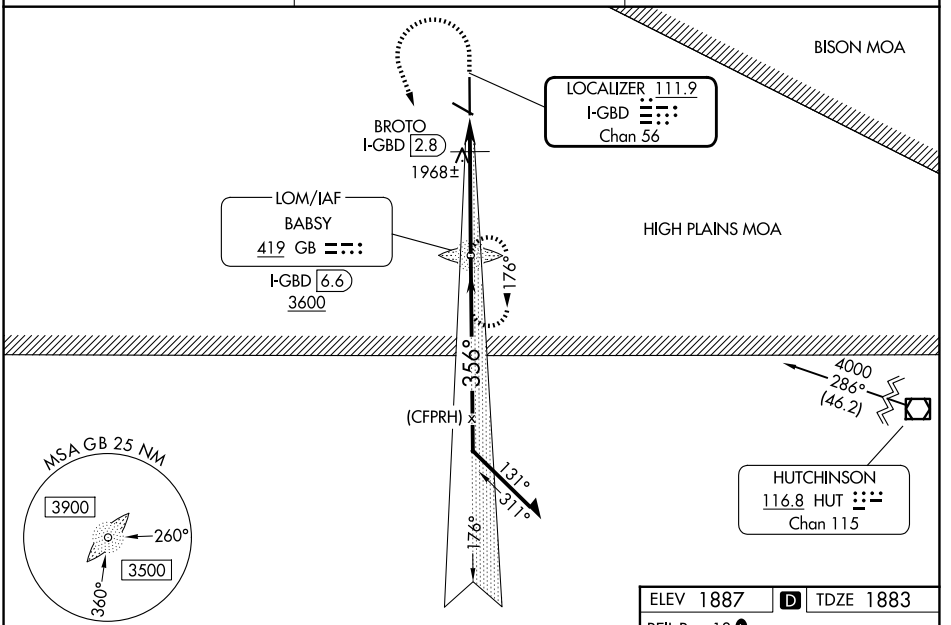

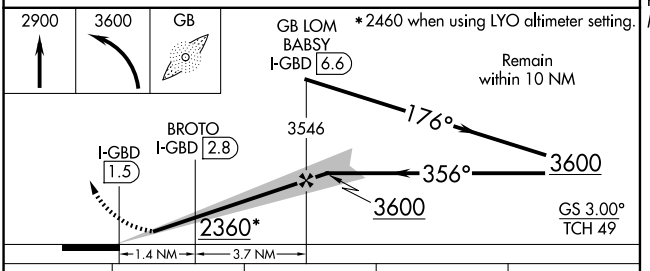

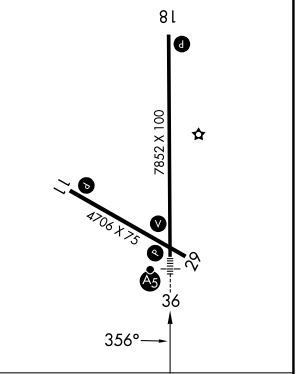

CATEGORY	A	B	C	D
S-ILS 36	2083-½ 200 (200-½)			
S-LOC 36	2360-½ 477 (500-½)		2360-1 477 (500-1)	
CIRCLING	2360-1 473 (500-1)		2520-1¾ 633 (700-1¾)	2640-2½ 753 (800-2½)
BROTO FIX MINIMUMS (DME REQUIRED)				
S-LOC 36	2220-½ 337 (400-½)			
CIRCLING	2300-1 413 (500-1)	2340-1 453 (500-1)	2520-1¾ 633 (700-1¾)	2640-2½ 753 (800-2½)

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026