RNAV (GPS) RWY 10R

CAPITAL REGION INTL (LAN)

WAAS CH 61314 W10A	APP CRS 096°	Rwy Ldg 8506 TDZE 861 Apt Elev 861


RNP APCH - GPS.


Circling Rwy 10L, 28R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 10R helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 6000, LNAV Cats A/B to RVR 5500 and Cats C/D to RVR 6000.

MALSR


MISSED APPROACH: Climb to 3000 direct DUTVE and hold.

ATIS	GREAT LAKES APP CON ★	LANSING TOWER	GND CON
119.75	118.65 226.4	119.9 240.9	121.9

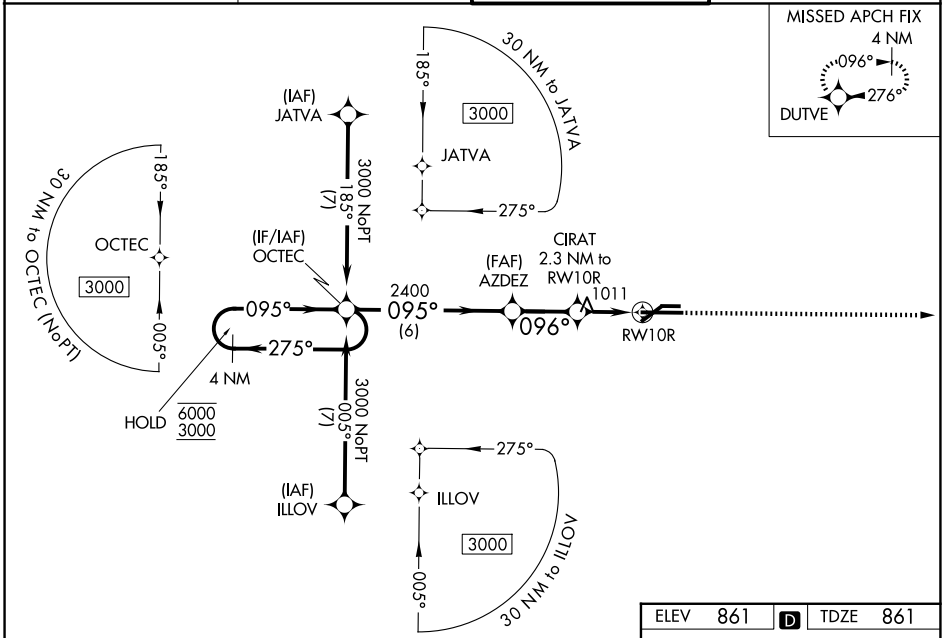

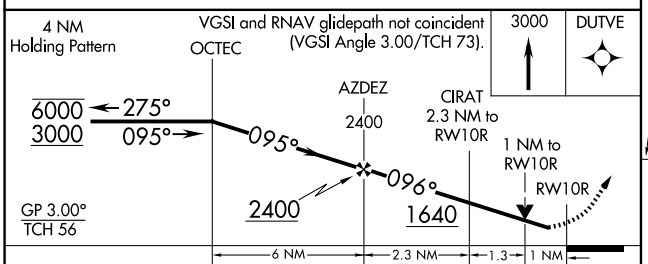

CATEGORY	A	B	C	D
LPV DA		1153/40	292 (300-¾)	
LNAV/VNAV DA		1245/40	384 (400-¾)	
LNAV MDA		1280/40	419 (500-¾)	
CIRCLING	1320-1 459 (500-1)	1340-1 479 (500-1)	1600-2 739 (800-2)	1760-3 899 (900-3)



MIRL Rwy 6-24
HIRL Rwy 10R-28L
REIL Rwys 6 and 24

EC-1, 26 NOV 2026 to 24 DEC 2026
EC-1, 26 NOV 2026 to 24 DEC 2026