BAF VORTAC	APP CRS	Rwy Ldg	9000
113.0	025°	TDZE	264
Chan 77		Apt Elev	270

VOR or TACAN RWY 2

WESTFIELD-BARNES RGNL (BAF)


RADAR required for procedure entry.


Rwy 2 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use BDL altimeter setting and increase all MDAs 60 feet and S-2 visibility Cat C/D/E ¼ SM. VDP NA when using BDL altimeter setting. Circling Rwy 15 NA at night.


-20°C

MISSED APPROACH: Climb to 3000 on BAF VORTAC R-028 to KLYDE INT/BAF 6 DME and hold, continue climb-in-hold to 3000.

ATIS	BRADLEY APP CON	WESTFIELD TOWER ★	GND CON
127.1 263.15	125.35 281.5	125.075 (CTAF) L 251.1	121.7 289.4

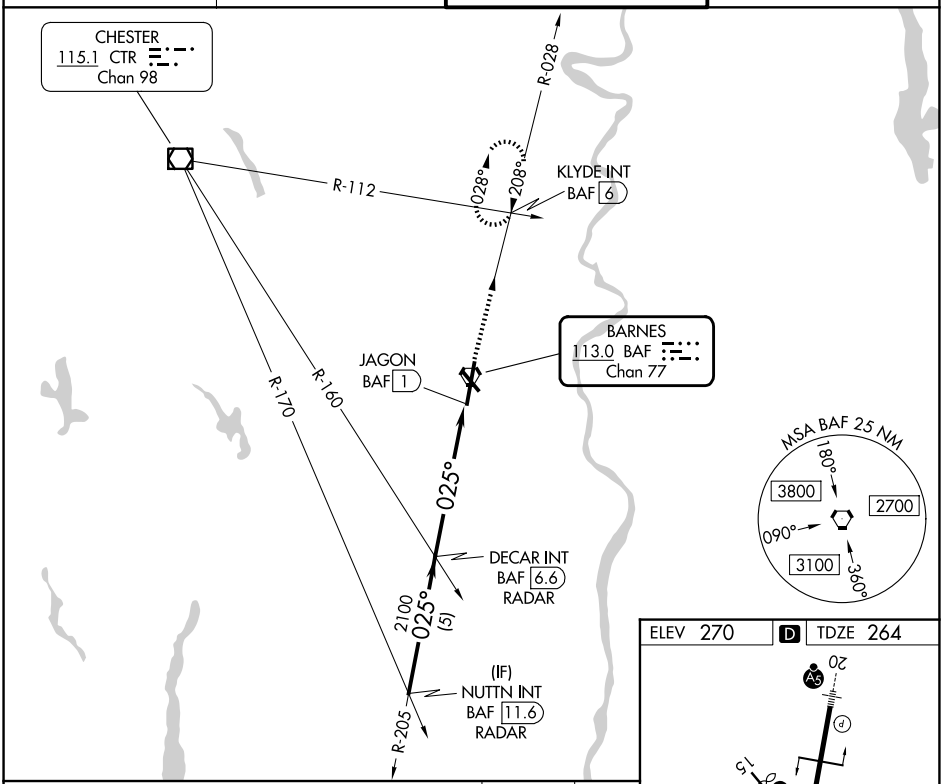

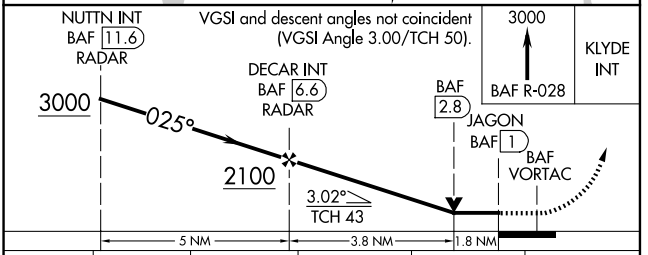

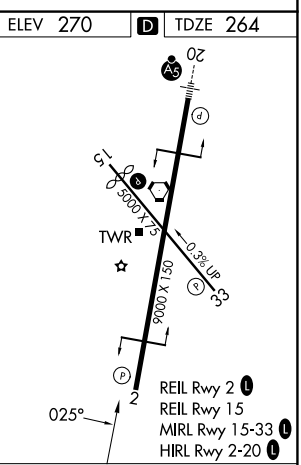

CATEGORY	A	B	C	D	E
S-2	900-1 636 (700-1)		900-1¾ 636 (700-1¾)		
CIRCLING	1160-1¼ 890 (900-1¼)		1160-2¾ 890 (900-2¾)	1660-3 1390 (1400-3)	

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

NE-1, 26 NOV 2026 to 24 DEC 2026
NE-1, 26 NOV 2026 to 24 DEC 2026