RNAV (GPS) RWY 22

ATLANTIC CITY INTL (ACY)

WAAS	APP CRS	Rwy Ldg	6145
CH 53631	218°	TDZE	68
W22A		Apt Elev	75


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). Rwy 22 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct TUBER and hold.

ATIS	ATLANTIC CITY APP CON	ATLANTIC CITY TOWER	GND CON
125.725 316.15	124.6 327.125	120.3 239.0	121.9 284.6

RADAR REQUIRED WHEN R-5002B IS ACTIVE.

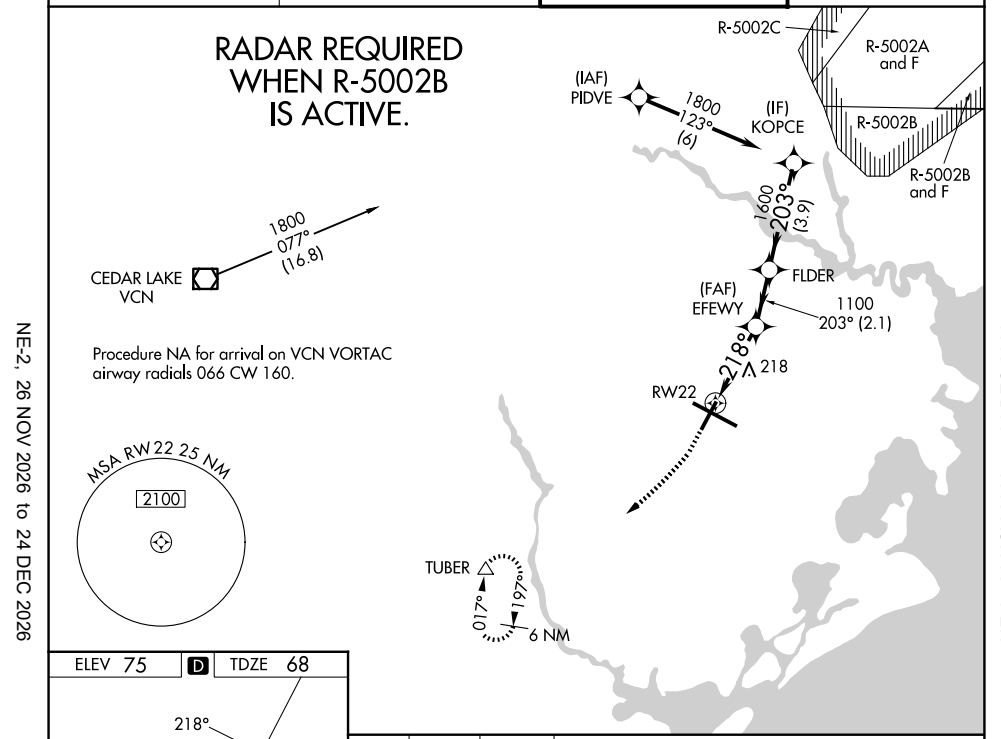

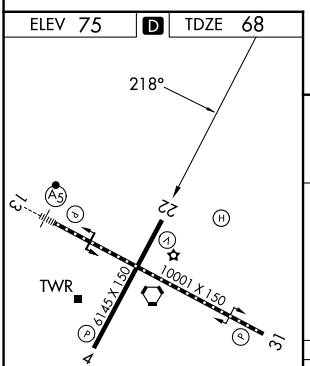

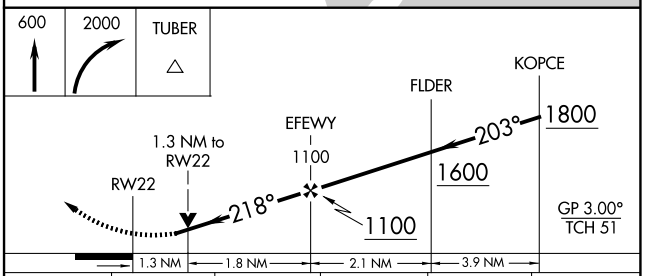

CATEGORY	A	B	C	D	E
LPV DA	364-1 296 (300-1)				
LNAV/VNAV DA	356-⅞ 288 (300-⅞)				
LNAV MDA	520-1 452 (500-1)		520-1⅜ 452 (500-1⅜)		
CIRCLING	540-1 465 (500-1)	600-1 525 (600-1)	620-1½ 545 (600-1½)	640-2 565 (600-2)	760-2½ 685 (700-2½)

TDZL/RCLS Rwy 13
HIRL Rwys 4-22 and 13-31
REIL Rwy 31

NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026