VOR RWY 36

VALDOSTA RGNL (VLD)


VOR/DME OTK	APP CRS	Rwy Ldg	8002
114.8	338°	TDZE	201
Chan 95		Apt Elev	203

T A Rwy 36 helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-36 Cats C and D visibility to 1⅝ SM. ASMUC fix minimums: increase S-36 C and D visibility to 1⅛ SM. Circling Rwy 4 and 22 NA at night. Inop table does not apply to S-36 Cats A and B and ASMUC fix minimums: Cat A and B. Straight-in and Circling Rwy 36 NA at night.


MALSR A5


MISSED APPROACH: Climb to 1200 then climbing left turn to 2000 direct OTK VOR/DME and hold, continue climb-in-hold to 2000.

ASOS	VALDOSTA APP CON ★	VALDOSTA TOWER ★	GND CON	UNICOM
126.225	126.6 285.6	128.35 (CTAF) L	121.7	122.95

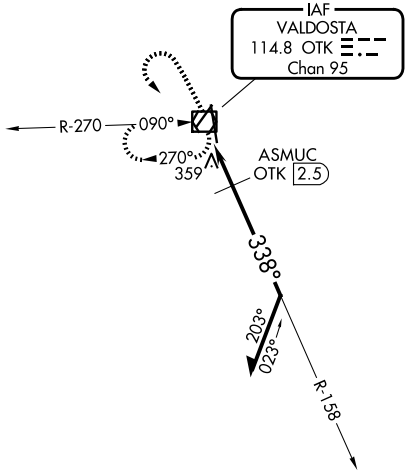

ELEV 203 D TDZE 201

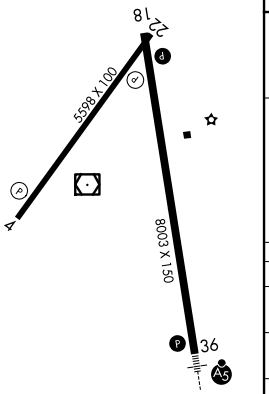

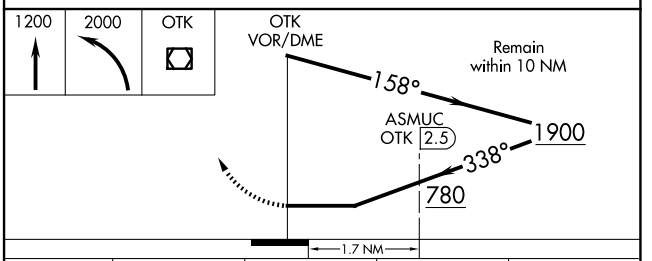

CATEGORY	A	B	C	D
S-36	780-1	579 (600-1)	780-1¼	579 (600-1¼)
CIRCLING	780-1	577 (600-1)	900-2 697 (700-2)	1020-2¾ 817 (900-2¾)
ASMUC FIX MINIMUMS				
S-36	620-1	419 (500-1)		
CIRCLING	660-1 457 (500-1)	700-1 497 (500-1)	900-2 697 (700-2)	1020-2¾ 817 (900-2¾)

SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026