RNAV (GPS) RWY 17

ACADIANA RGNL (ARA)

WAAS CH 82501 W17A	APP CRS 168°	Rwy Ldg 8002 TDZE 24 Apt Elev 24


RNP APCH.


T Circling NA to Rwys 17W and 35W. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cats C/D visibility to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.

ODALS


MISSED APPROACH: Climb to 480 then climbing left turn to 2000 direct CLYNT and hold.

ASOS	LAFAYETTE APP CON★	ACADIANA TOWER★	GND CON	UNICOM
133.325	121.1 268.7	125.0 (CTAF) L 239.3	121.7	122.95

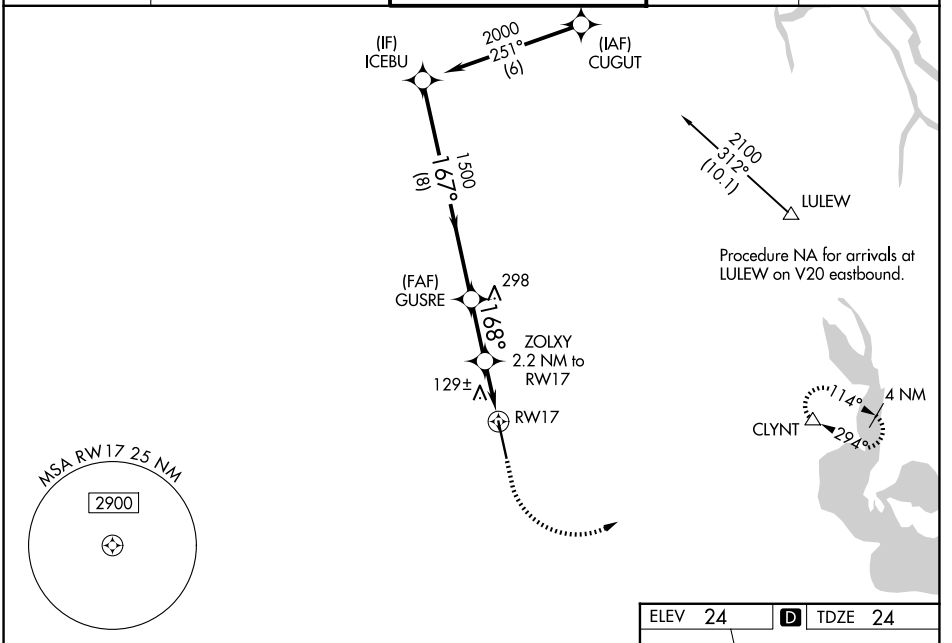

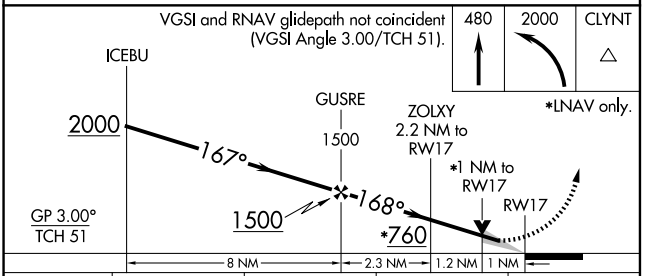

CATEGORY	A	B	C	D
LPV DA	274-¾		250 (300-¾)	
LNAV/VNAV DA	420-1⅛		396 (400-1⅛)	
LNAV MDA	380-¾	356 (400-¾)	380-⅞	356 (400-⅞)
CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)

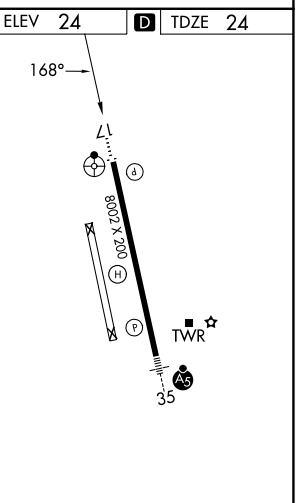

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026