RNAV (GPS) RWY 18

DUPONT/LAPEER (D95)


WAAS	APP CRS	Rwy Ldg	3800
CH 56234	184°	TDZE	835
W18A		Apt Elev	835

RNP APCH - GPS.


Rwy 18 helicopter visibility reduction below 1 SM NA. Circling NA to Rwys 9 and 27. When local altimeter setting not received, use FNT altimeter setting and increase all MDAs 60 feet and increase LP Cat C visibility ⅛ SM, LNAV Cat C and Circling Cat C visibility ¼ SM.


MISSED APPROACH: Climb to 3000 direct ZUSDI and hold.

AWOS-3P	GREAT LAKES APP CON ★	UNICOM
134.05	118.8 257.9	123.0 (CTAF) L

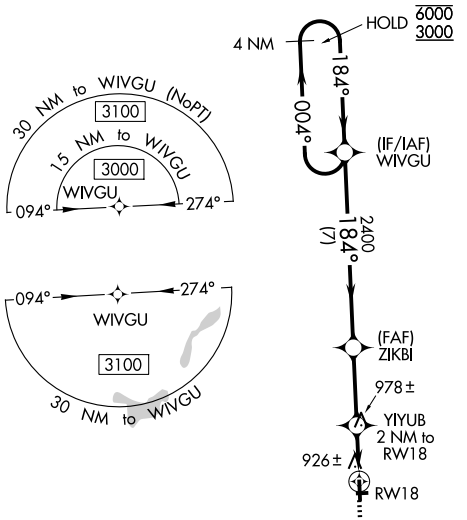


MISSED APCH FIX



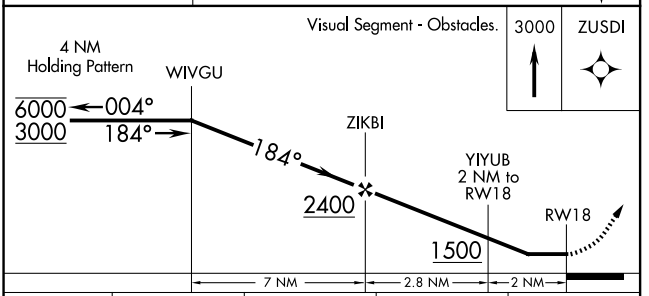

CATEGORY	A	B	C	D
LP MDA	1180-1 345 (400-1)			NA
LNAV MDA	1240-1 405 (500-1)		1240-1⅛ 405 (500-1⅛)	NA
CIRCLING	1300-1 465 (500-1)	1380-1 545 (600-1)	1460-1¾ 625 (700-1¾)	NA

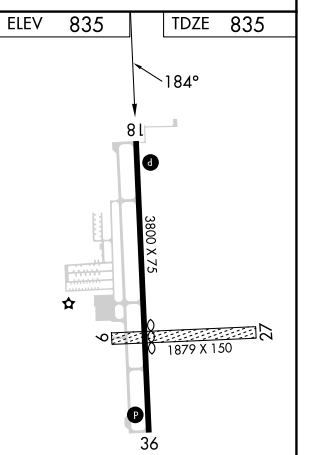

MIRL Rwy 18-36 L
REIL Rwy 18 and 36 L

EC-1, 26 NOV 2026 to 24 DEC 2026
EC-1, 26 NOV 2026 to 24 DEC 2026