RNAV (GPS) RWY 9


SPACE COAST RGNL (TIX)


WAAS	APP CRS	Rwy Ldg	5000
CH 86536	094°	TDZE	32
W09A		Apt Elev	34

T A DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 46°C (115°F). When local altimeter setting not received, use Melbourne altimeter setting and increase all LPV DA to 352 feet, increase all LNAV/VNAV DA to 407 feet and all visibilities ¼ SM; increase all LNAV MDAs 60 feet and Cat C and D visibility ¼ SM. Rwy 9 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Melbourne altimeter setting.


MISSED APPROACH: Climb to 800 then climbing right turn to 2800 direct CUJEN and hold.

ATIS	ORLANDO APP CON	SPACE COAST TOWER ★	GND CON	UNICOM
120.625	134.95 281.425	118.9 (CTAF) L	121.85	122.95

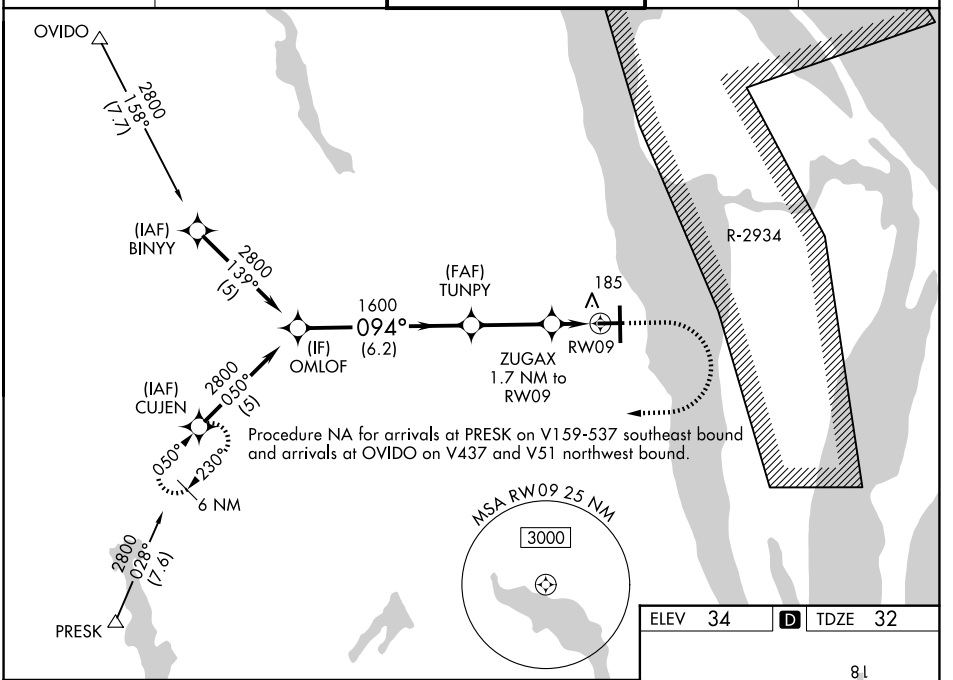

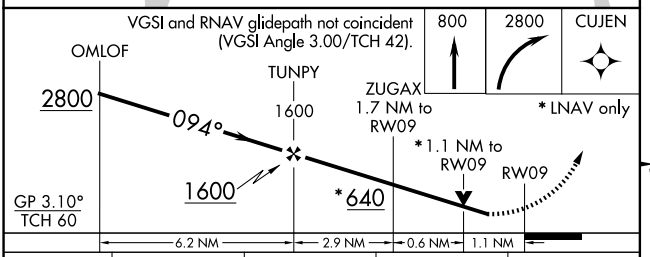

CATEGORY	A	B	C	D
LPV DA	292-1	260 (300-1)		
LNAV/VNAV DA	347-1	315 (400-1)		
LNAV MDA	420-1	388 (400-1)	420-1⅛	388 (400-1⅛)
CIRCLING	640-1	606 (700-1)	640-1¾ 606 (700-1¾)	640-2 606 (700-2)

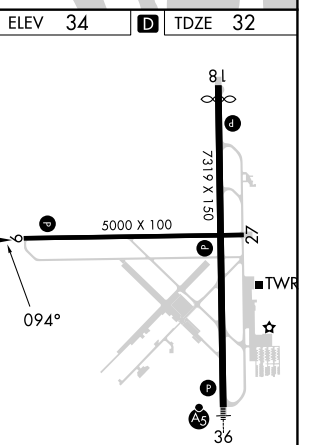

SE-3, 26 NOV 2026 to 24 DEC 2026
SE-3, 26 NOV 2026 to 24 DEC 2026