WAAS	APP CRS	Rwy Ldg	5005
CH 49215	176°	TDZE	842
W18A		Apt Elev	864

RNAV (GPS) RWY 18


BRIDGEPORT MUNI (XBP)


RNP APCH.


Baro-VNAV and VDP NA when using Decatur altimeter setting. Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 1342 feet and LNAV/VNAV DA to 1423 feet; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3600 direct FIPAL and on track 241° to TIEON and hold, continue climb-in-hold to 3600.

AWOS-3PT	FORT WORTH CENTER	UNICOM
119.225	127.0 360.6	123.0 (CTAF)

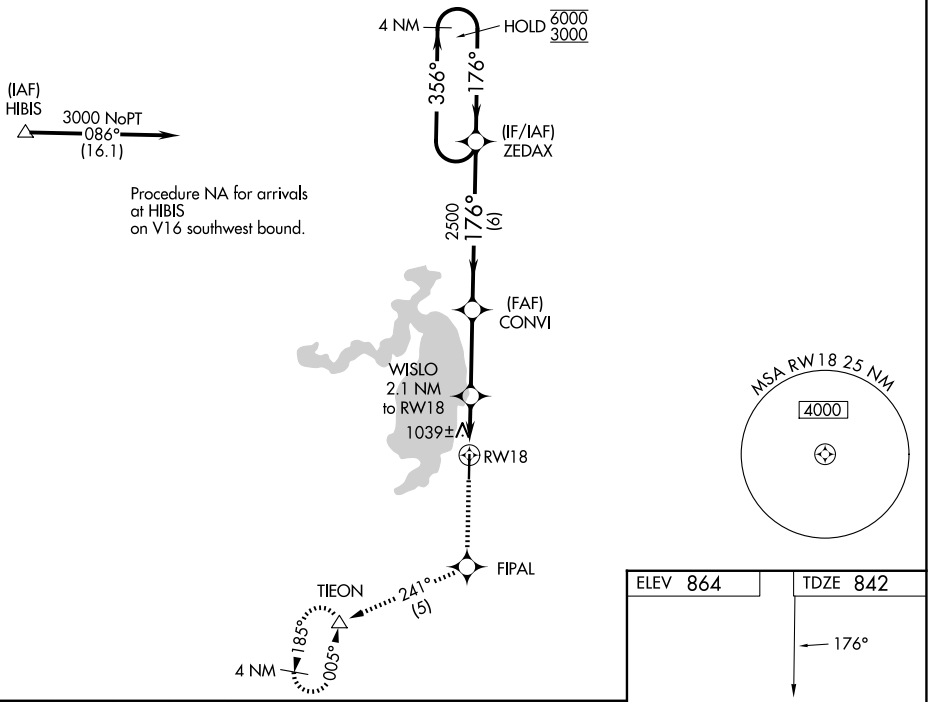

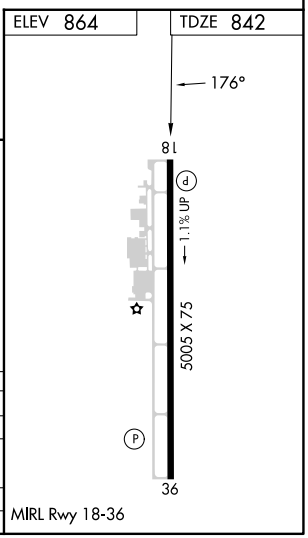

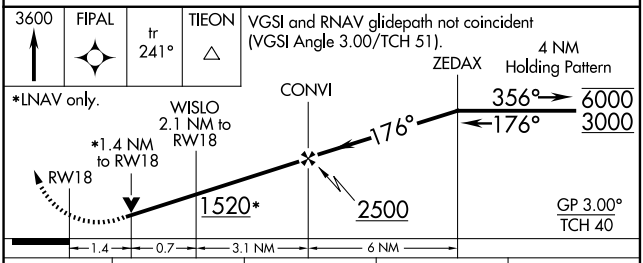

CATEGORY	A	B	C	D
LPV DA	1285-1½	443 (500-1½)	NA	
LNAV/VNAV DA	1366-2	524 (600-2)	NA	
LNAV MDA	1300-1	458 (500-1)	NA	
CIRCLING	1480-1	616 (700-1)	NA	

SC-2, 26 NOV 2026 to 24 DEC 2026
SC-2, 26 NOV 2026 to 24 DEC 2026