RNAV (GPS) RWY 36
GOLDEN TRIANGLE RGNL (GTR)


WAAS CH 99600 W36A	APP CRS 002°	Rwy Ldg 8003 / TDZE 261 / Apt Elev 264


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Columbus AFB altimeter setting: increase LPV DA to 500 feet, LNAV/VNAV DA to 593 feet and LNAV/VNAV visibility ⅛ SM; increase all MDAs 40 feet. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.


MISSED APPROACH: Climb to 3000 direct HUYKA and hold.

ATIS	COLUMBUS APP CON★	GOLDEN TRIANGLE TOWER★	GND CON	UNICOM
126.375	135.6 323.275	118.2 (CTAF) L 298.875	135.375 322.475	122.95

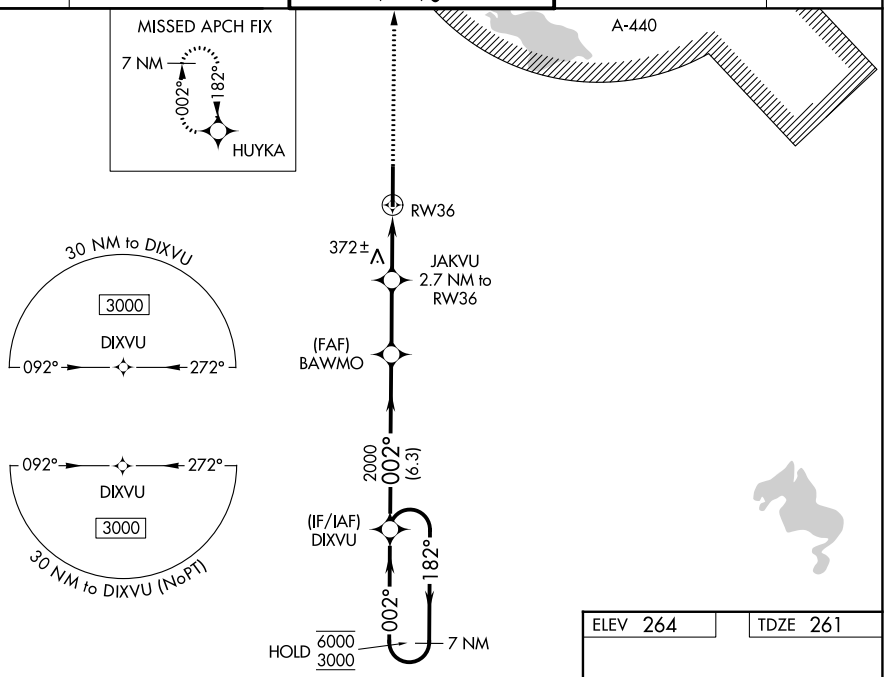

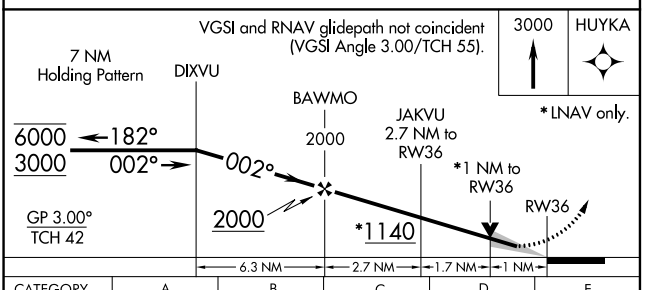

CATEGORY	A	B	C	D	E
LPV DA	461-¾ 200 (200-¾)				
LNAV/VNAV DA	554-⅞ 293 (300-⅞)				
LNAV MDA	640-1 379 (400-1)		640-1⅛ 379 (400-1⅛)		
CIRCLING	760-1 496 (500-1)		960-2 696 (700-2)	960-2¼ 696 (700-2¼)	960-2½ 696 (700-2½)

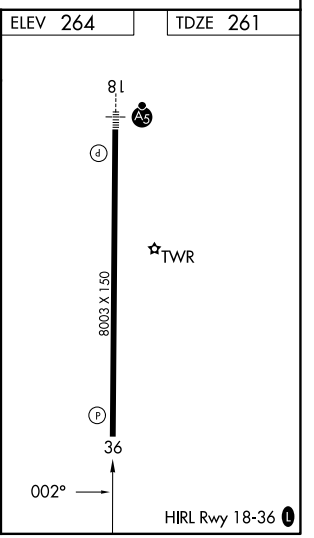

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026