# RNAV (GPS) RWY 29

## SWINTON SMITH FLD AT REIDSVILLE MUNI (RVJ)

| WAAS CH 42547 W29A | APP CRS 294° | Rwy Ldg 5003 TDZE 196 Apt Elev 196 |
|---|---|---|


RNP APCH - GPS.

RADAR required for procedure entry when R-3005 A/B/C/E active.


T A Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Hold-in-lieu NA when R-3005 A/B/C/E active.

MISSED APPROACH: Climb to 3000 direct FEVNA and hold, continue climb-in-hold to 3000.

| AWOS-3PT | JACKSONVILLE CENTER | CTAF |
|---|---|---|
| 128.325 | 127.575 269.025 | 122.9 L |

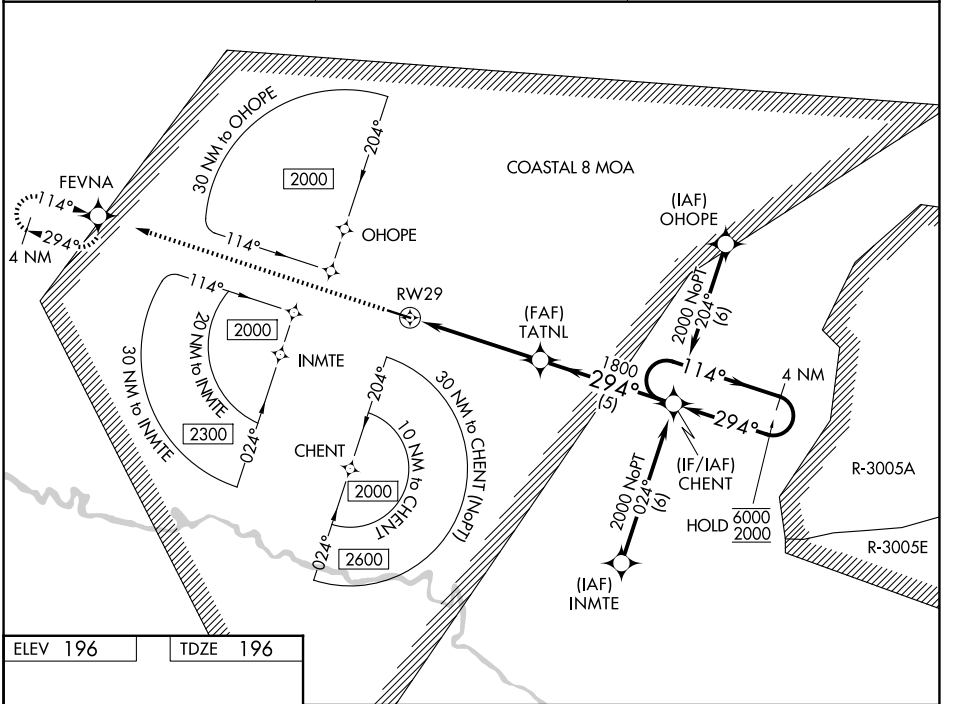


ELEV 196 TDZE 196

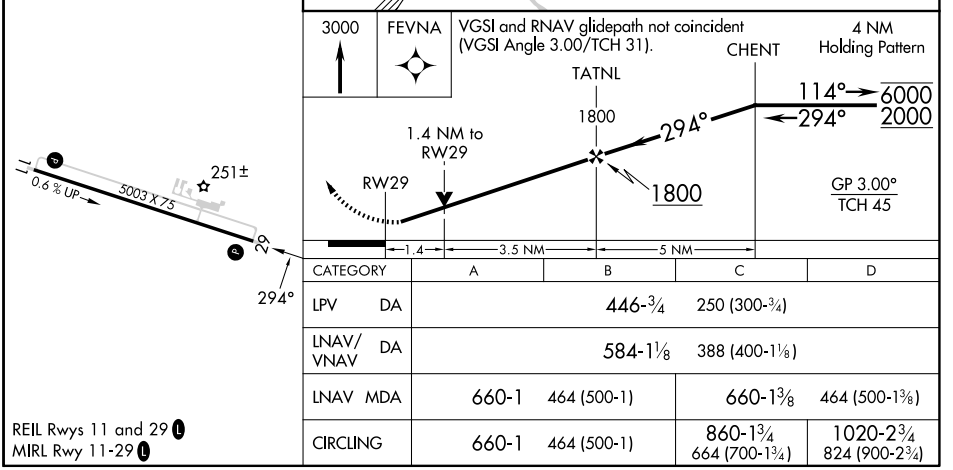


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 446-¾ | 250 (300-¾) | | |
| LNAV/VNAV DA | 584-1⅛ | 388 (400-1⅛) | | |
| LNAV MDA | 660-1 | 464 (500-1) | 660-1⅜ | 464 (500-1⅜) |
| CIRCLING | 660-1 | 464 (500-1) | 860-1¾ 664 (700-1¾) | 1020-2¾ 824 (900-2¾) |

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L




SE-4, 26 NOV 2026 to 24 DEC 2026