RNAV (GPS) RWY 17

HAMPTON MUNI (HPT)


WAAS	APP CRS	Rwy Ldg	4020
CH 58133	177°	TDZE	1176
W17A		Apt Elev	1176


VDP and Baro-VNAV NA when using Mason City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP- 0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Mason City altimeter setting and increase all DA 67 feet and all MDA 80 feet, and LNAV/VNAV all Cats visibility ¼ mile.


NA


MISSED APPROACH: Climb to 4000 direct WURLU and hold, continue climb-in-hold to 4000.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
121.025	134.0 288.3	122.7 (CTAF) L




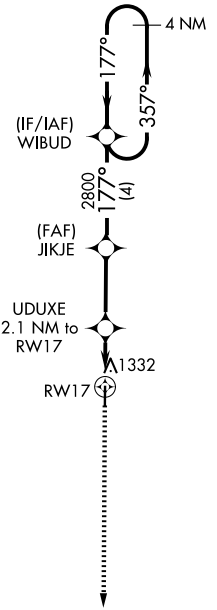



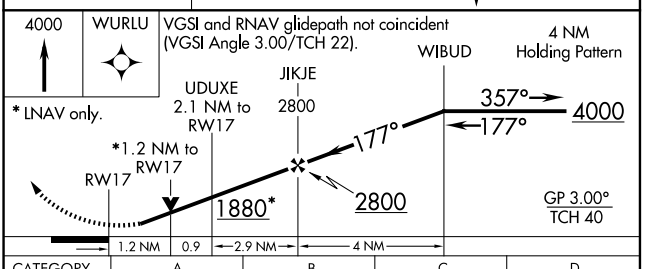

CATEGORY	A	B	C	D
LPV DA	1426-1	250 (300-1)	NA	
LNAV/VNAV DA	1605-1½	429 (500-1½)	NA	
LNAV MDA	1600-1	424 (500-1)	NA	
CIRCLING	1640-1	464 (500-1)	NA	

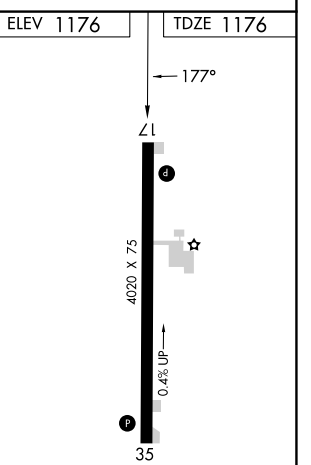

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026