RNAV (GPS) RWY 14

SMITH CENTER MUNI (K82)


WAAS	APP CRS	Rwy Ldg	4400
CH 78335	143°	TDZE	1798
W14A		Apt Elev	1800


RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using CNK altimeter setting. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2172 feet; increase LNAV/VNAV DA to 2250 and all visibilities ⅜ SM; increase all MDAs 180 feet and Circling all Cats visibility ½ SM.


MISSED APPROACH: Climb to 3700 direct JUXUL and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.45	119.4 278.8	122.8 (CTAF) L

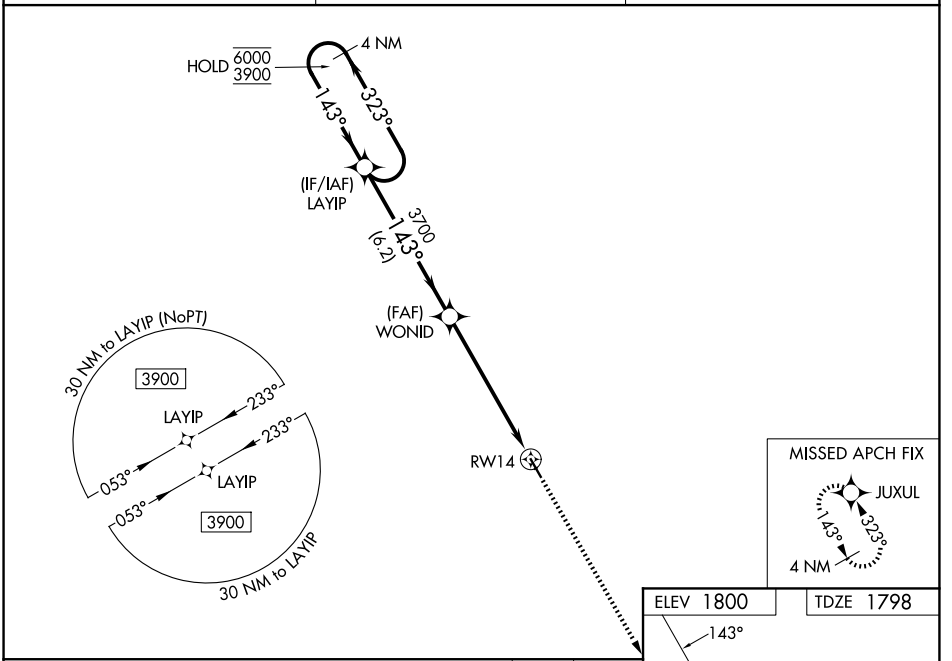

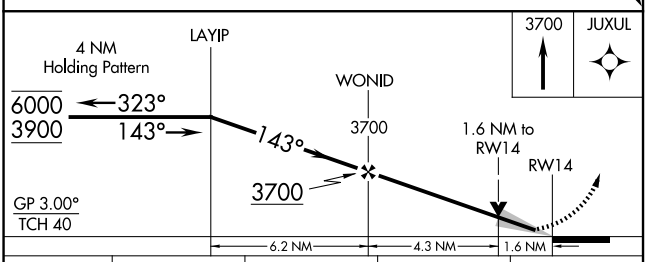

CATEGORY	A	B	C	D
LPV DA	1998-1	200 (200-1)	NA	
LNAV/VNAV DA	2076-1	278 (300-1)	NA	
LNAV MDA	2320-1	522 (600-1)	NA	
CIRCLING	2480-1 680 (700-1)	2580-1 780 (800-1)	NA	

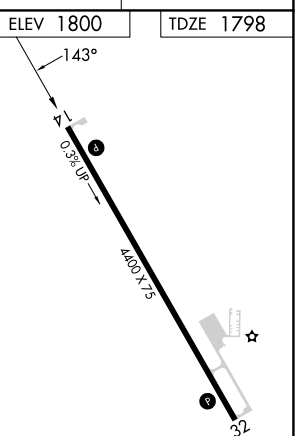

MIRL Rwy 14-32 L
REIL Rwys 14 and 32 L

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026