RNAV (GPS) RWY 17

PAULS VALLEY MUNI (PVJ)


WAAS CH **86718** **W17A**	APP CRS **174°**	Rwy Idg **5001** TDZE **971** Apt Elev **971**

RNP APCH.

When local altimeter setting not received, use Ardmore Downtown Exec altimeter setting and increase all DA 97 feet and all MDA 100 feet and LNAV/VNAV visibility ¼ SM all Cats, LNAV Cat C, D visibility ¼ SM and Circling Cat C visibility ¼ SM, and Cat D visibility ½ SM. Baro-VNAV and VDP NA when using Ardmore Downtown Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 46°C.

MISSED APPROACH: Climb to 3000 direct TAXTU and hold.


AWOS-3	FORT WORTH CENTER	UNICOM
118.675	**124.75 323.0**	**122.8** (CTAF) L

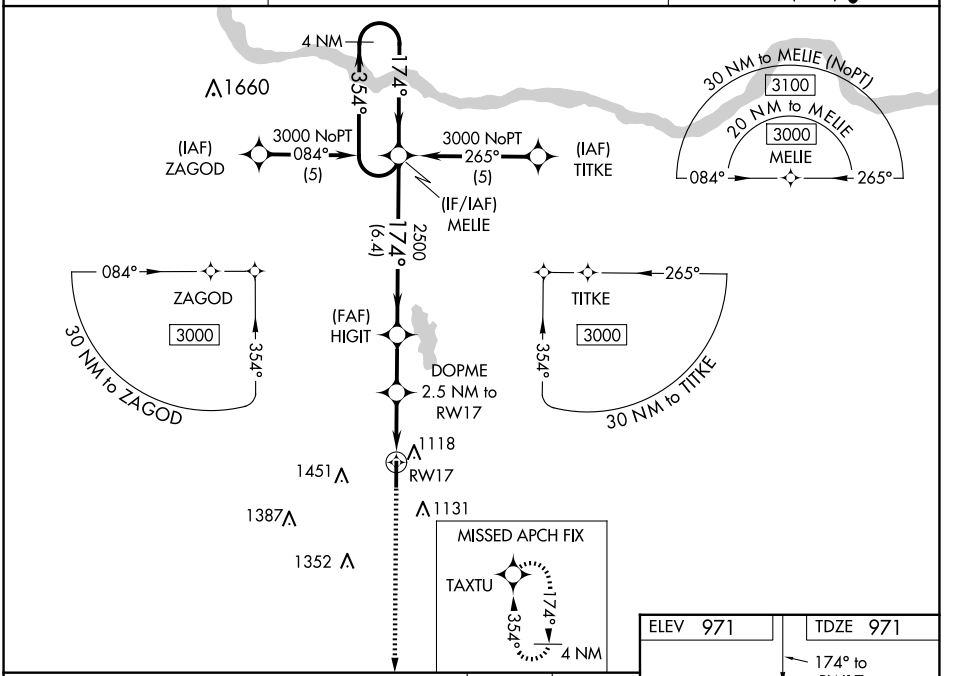


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).

3000 TAXTU

*LNAV only.

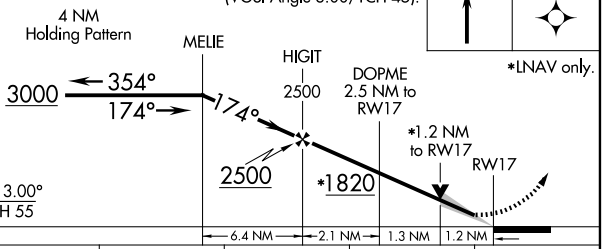

CATEGORY	A	B	C	D
LPV DA	1171-1 200 (200-1)			
LNAV/VNAV DA	1413-1½ 442 (500-1½)			
LNAV MDA	1420-1 449 (500-1)		1420-1¼ 449 (500-1¼)	1420-1¾ 449 (500-1¾)
CIRCLING	1440-1 469 (500-1)		1540-1½ 569 (600-1½)	1760-2 789 (800-2)

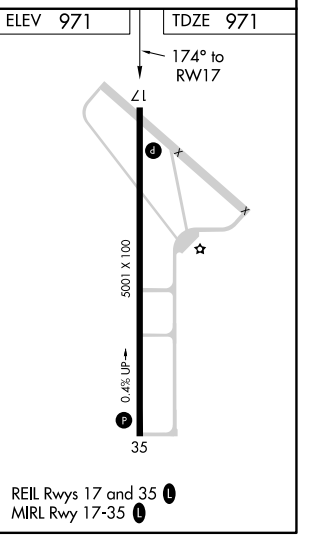

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026