# RNAV (GPS) RWY 2


JOHN C TUNE (JWN)

| WAAS CH 78325 W02A | APP CRS 018° | Rwy Ldg 6001 / TDZE 484 / Apt Elev 501 |
|---|---|---|

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA E of Rwy 2-20. Baro-VNAV and VDP NA when using Nashville Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Nashville Intl altimeter setting and increase all DAs 39 feet and all MDAs 40 feet; increase LPV visibility all Cats ⅛ SM, LNAV visibility Cat B ¼ SM.

MISSED APPROACH: Climb to 3000 direct BICOL and hold.

| ATIS | NASHVILLE APP CON | JOHN TUNE TOWER ★ | GND CON |
|---|---|---|---|
| 127.075 | 119.35 372.0 | 119.45 (CTAF) | 121.7 |

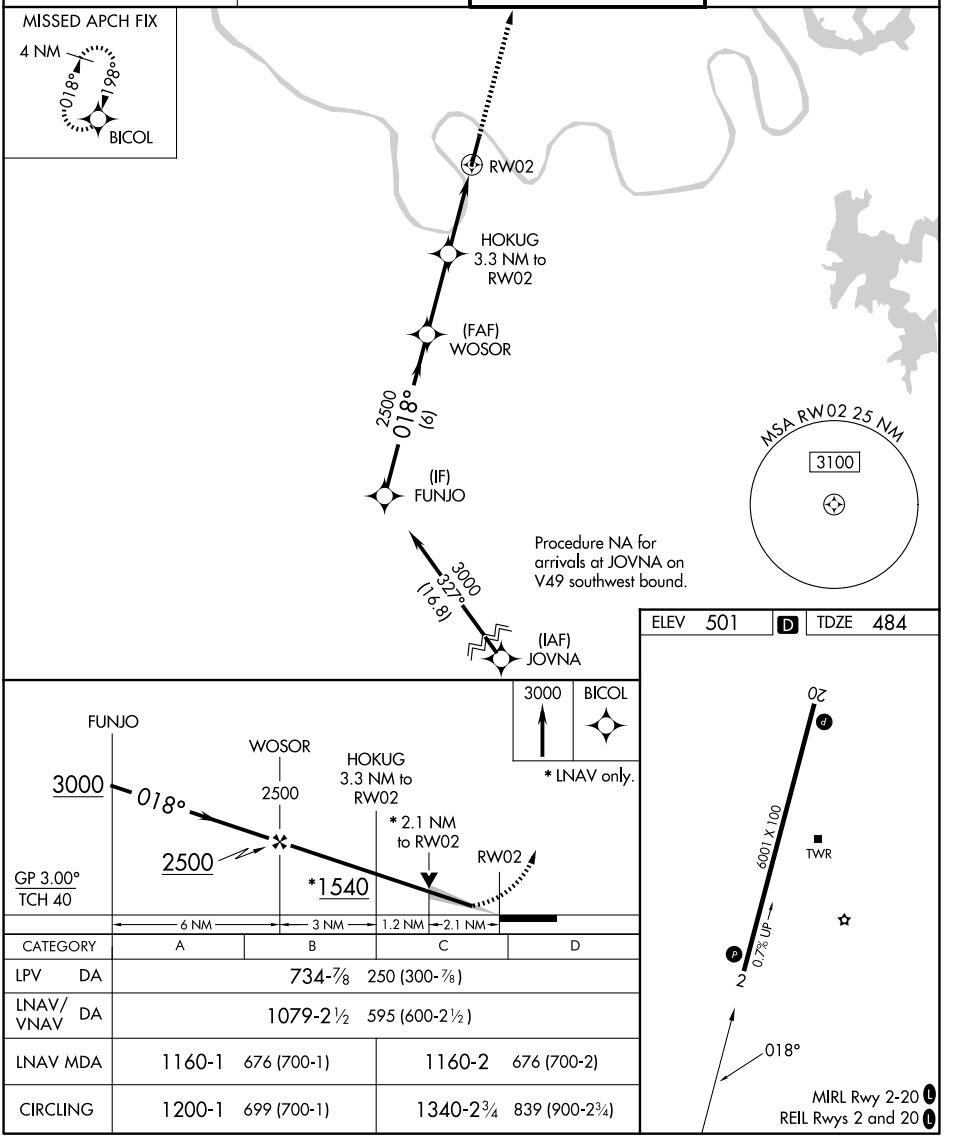


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 734-⅞ 250 (300-⅞) | | | |
| LNAV/VNAV DA | 1079-2½ 595 (600-2½) | | | |
| LNAV MDA | 1160-1 676 (700-1) | | 1160-2 676 (700-2) | |
| CIRCLING | 1200-1 699 (700-1) | | 1340-2¾ 839 (900-2¾) | |




SE-1, 26 NOV 2026 to 24 DEC 2026