VOR RWY 22


SELAWIK (WLK) (PASK)


VOR/DME WLK	APP CRS	Rwy Ldg	3002
114.2	223°	TDZE	17
Chan 89		Apt Elev	17

Circling Rwy 4, 9, 27 NA at night. When local altimeter setting not received, use OTZ/PAOT altimeter setting and increase all MDAs 160 feet and S-22 visibility Cat C/D ½ SM. And GODBE fix minimums visibility Cat C/D ½ SM, and Circling visibility Cat C/D ½ SM.


MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 direct WLK VOR/DME and hold, continue climb-in-hold to 2500.

AWOS-3P	ANCHORAGE CENTER	KOTZEBUE RADIO	CTAF
135.65	119.2 263.0	122.5	122.7 L

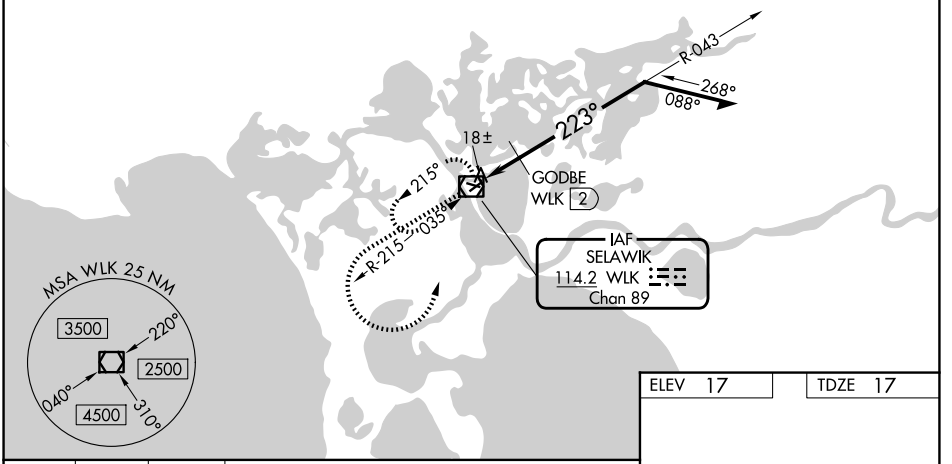

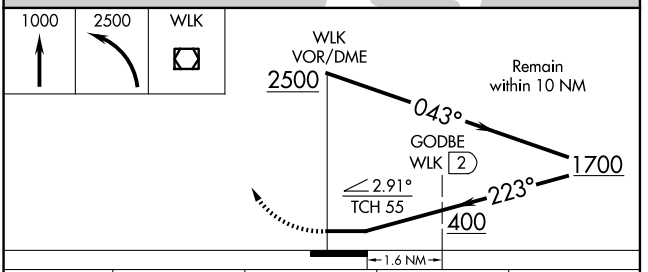

CATEGORY	A	B	C	D
S-22	400-1 383 (400-1)		400-1⅛ 383 (400-1⅛)	
CIRCLING	480-1 463 (500-1)	580-1 563 (600-1)	580-1½ 563 (600-1½)	580-2 563 (600-2)
GODBE FIX MINIMUMS				
S-22	380-1 363 (400-1)			
CIRCLING	480-1 463 (500-1)	580-1 563 (600-1)	580-1½ 563 (600-1½)	580-2 563 (600-2)

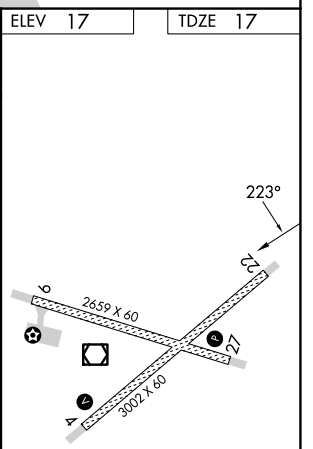

MIRL Rwys 9-27 and 4-22 L

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026